



ALLIED MACHINE & ENGINEERING

Holemaking Solutions for Today's Manufacturing



Drilling



Reaming



Burnishing



Threading



Specials



Criterion[®]

► **BORING**

Modular Boring Systems

CRITERION[®]

North America

Allied Machine
120 Deeds Drive
Dover, OH 44622
United States

Allied Machine
485 West 3rd Street
Dover, OH 44622
United States

ThreadMills USA™
4185 Crosstowne Ct #B
Evans, GA 30809
United States

Superion®
1285 S Patton St.
Xenia, OH 45385
United States

Europe

Allied Machine Europe
93 Vantage Point
Pensnett Estate
Kingswinford
West Midlands
DY6 7FR, United Kingdom

Wohlhaupter® GmbH
Maybachstrasse 4
Postfach 1264
72636 Frickenhausen
Germany

Asia

Wohlhaupter® India
B-23, 3rd Floor
B Block Community Centre
Janakpuri, New Delhi - 110058
India



Allied Machine & Engineering is a worldwide leader in holemaking and finishing solutions. We are committed to providing practical and dependable solutions to our customers through innovative designs and superior customer and technical support.

We continue to expand our product offering in order to provide new and different solutions. With Field Sales Engineers located around the world, we position ourselves to provide technical support on site, right at your spindle.



**ALLIED MACHINE
& ENGINEERING**

www.alliedmachine.com

Criterion® Boring Systems

The Foundation

Since 1941, Allied Machine & Engineering has provided dependable and practical holemaking solutions to the world. What was once a small job shop in Ohio is now a worldwide leader in cutting tool technology. With three manufacturing facilities in Ohio, one in Georgia, another in Germany, and headquarters in both the United States and Europe, Allied Machine is positioned to bring innovative solutions and technical expertise directly to the customers' hands.



The Beginning

Harold E. Stokey founded Allied Machine & Engineering to aid the war effort, manufacturing taper bearing lock nuts for the production of M1 tanks. Years later, after a sales meeting gone wrong, Stokey possessed a warehouse stocked with spade drill inserts. He set forth into the industry that would become Allied Machine's thriving identity: holemaking.



The T-A®

When Harold's son, William H. Stokey, became the president and CEO, he developed the Throw Away, or T-A, spade drill insert system. The T-A revolutionized the holemaking industry, launching Allied Machine ahead of the competition. Since then, numerous innovations and advancements have been created from the T-A's inspiration.



The Innovation

Since the development of the T-A, Allied Machine has expanded its product offering to support a vast range of customer applications, including large diameter and deep hole drilling, boring, reaming, burnishing, porting, and threading.

The People

Allied Machine understands that high quality products are only one facet of success. Our customer support is crucial to what we do, and that's why we make sure the best engineers and customer service associates are in place to assist our customers around the world.

The Future

With over 75 years of experience, Allied Machine has encountered the challenges of growth and success. By investing in cutting edge technology and the brightest and sharpest minds, our knowledge and capabilities continue to expand and grow every day.



Steve Stokey
Executive Vice President

William H. Stokey
President and CEO

Mike Stokey
Executive Vice President



Replaceable Insert Drills

- Reduce costs by decreasing setup time and utilizing a single holder for the lives of multiple inserts
- Provide flexibility to quickly switch between inserts with different geometries
- Products:
 - GEN3SYS® XT | GEN3SYS® XT Pro
 - T-A® | T-A® GEN2 | T-A Pro®
 - High Performance | Universal



Indexable Insert Drills

- Protect your investment and reduce your inventory with replaceable cartridges that allow the same holder to be used repeatedly
- Indexable inserts increase productivity and tool life while reducing costs
- Products:
 - 4TEX® Drill
 - Revolution Drill®
 - Opening Drill®



Replaceable / Indexable Insert Drills

- Drill large diameter holes and maximize penetration rates even on low horsepower machines
- Delivers strength and versatility needed for any deep hole drilling application
- Holders cover a range of sizes with the replaceable heads determining the cutting diameter
- Products:
 - APX™ Drill



Solid Carbide Drills

- Offer greater strength and stability when drilling tougher materials
- Available in diameters from 3mm - 20mm
- Can be made-to-order specifically for your application (Superion® quoted specials)
 - ASC 320®
 - Superion®



Structural Steel Solutions

- Deliver outstanding performance and durability in structural steel applications
- Designed to produce optimal results in difficult-to-machine materials
- Available in multiple lengths and diameters
- T-A® style drills have different insert geometry options to improve performance, depending on material
- Products:
 - T-A® | T-A® GEN2
 - GEN3SYS® XT Pro



BTA (STS) Machining Solutions

- The internal ejection system flushes chips and debris from the hole with no interference to the cutting process
- Utilizes the advantages of the T-A® drill insert
- Designed to significantly increase penetration rates over brazed heads and traditional gun drills
- Products:
 - BT-A Drill



Hydraulic Port Contour Cutters

- Save significant time and money by performing four processes in one step
- Replaceable insert design reduces costs, inventory, and setup times
- Available in four industry specifications:
 - Imperial: SAE J-1926
 - Metric: ISO 6149-1:2006
 - Military: SAE AS5202
 - John Deere: JDS-G173.1
- Products:
 - AccuPort 432®



Enhanced Special Drilling Capabilities


- Allied Machine engineers are available to meet with you to evaluate your application and recommend the best solution for you
- Special drilling solutions can incorporate advanced features such as adjustable diameter locations, multiple steps, additional coolant designs, special lengths and diameters, and more
- Special drills can drastically reduce your cost per hole and increase your overall productivity by eliminating multiple processes and increasing tool life



WOHLHAUPTER®

High Precision Boring Systems

- Designs available for high volume applications that increase rigidity to improve performance
- Versatile boring heads that are flexible with changing applications while maintaining excellent performance
- Provides high precision with absolute repeatability to ensure every part is held to tolerance
- Offers an industry leading modular shank connection that maintains rigidity and reduces inventory on your boring system
- Available with both digital and analog settings
- Products:
 - Wohlhaupter® Boring Tools

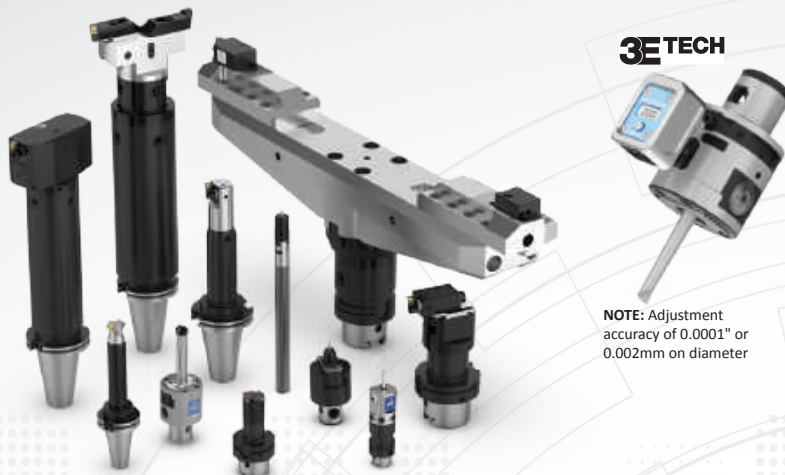

NOTE: Adjustment accuracy of 0.0001" or 0.002mm on diameter



CRITERION®

Modular Boring Systems

- The modular capabilities are ideal for use across multiple different projects
- Offers versatile boring heads suitable for job shops and tooling rooms
- Provides an economical solution for low volume and/or short-term production applications
- Offers finish boring solutions
- Products:
 - Criterion® Boring Tools

S.C.A.M.I.®

Expandable Reaming Solutions

- Expandable cutting diameters accommodate for wear, which extends tool life
- Replaceable cutting heads and rings reduce waste and improve production time versus solid high speed steel and carbide reamers
- Holds tight tolerances to ensure processes are performed to accurate specifications
- Reduces tooling costs because many items are available for reconditioning
- Products:
 - ALVAN® Reamers



S.C.A.M.I.®

Roller Burnishing Solutions

- Produce excellent surface finishes
- Provide accurate size control
- Increase surface hardness
- Solutions for both through hole and blind hole applications
- Products:
 - S.C.A.M.I.® Roller Burnishing Tools





Solid Carbide Thread Mills

- Available with coolant through options
- Covers a wide range of thread forms
- Provides optimal solutions for both high production projects and short-run applications
- Products
 - AccuThread® 856
 - AccuThread® T3
 - ThreadMills USA™



Replaceable Insert Thread Mills

- Three insert lengths are available that cover a wide range of thread forms
- Holders can utilize inserts with different pitches and thread forms
- Repeatability is achieved by both the bolt-in style and the pin style locking systems
- Increases tool life by 25 - 50% with Allied Machine's AM210® coating
- Products
 - AccuThread® 856: Bolt-in Style
 - AccuThread® 856: Pin Style



SPECIAL CAPABILITIES

When it comes to designing and developing special solutions for customers, Allied Machine is the top choice. If your application requires special tooling, give us a call. Our engineered specials are developed by the brightest engineers in the industry. Most of our standard tooling can be altered as specials, or we can create entirely new concepts for particularly unique applications.

One special tooling solution is Insta-Quote®, the online system that allows you to design your own special tooling 24/7. Receive a quote and drawings within minutes just by following the steps.

And with the addition of Superior® technology and capabilities, we can customize made-to-order solid carbide tools to achieve optimal results for your applications.

Whatever your application, Allied Machine has the answer.



Insta-Quote® 



 **SUPERIOR**



ToolMD®

Increase the production and success of your applications today.

- Direct access to 2D drawings and 3D models
- Assemble and view tool images in your browser
- Download drawings for use in most machining software programs
- Browse products, search item numbers, and save assemblies for future use




toolmd.com

WOHLHAUPTER® Boring Insert Selector

Find the best insert for your application.

- Generate the correct boring insert for your job in just six easy steps
- Choose type, shape, substrate, insert form, nose radius, and material
- Order easily by adding the item to your cart



alliedmachine.com/bis



Product Selector

Use the product selector to find the right tool for your application.

- Follow guided steps to generate the right tool for your application
- Learn about your recommended tool and how to maximize its performance



alliedmachine.com/productselector

Insta-Code®



Eliminate the wait. Get your program now.

- Choose the best thread mill for your application
- Create program code for your machine
- Available as a PC download app (that can be used offline)
- Website app available 24/7



Insta-Code also has a
Cycle Time Calculator

alliedmachine.com/InstaCode




Insta-Quote®



Design your custom tooling and receive a drawing and quote...all within minutes.

- Design and quote your own tooling
- Generate the solution you need in just a few steps
- Features the following products

- T-A® Inserts
- T-A® Holders
- GEN3SYS® XT Holders
- ALVAN® Reamers

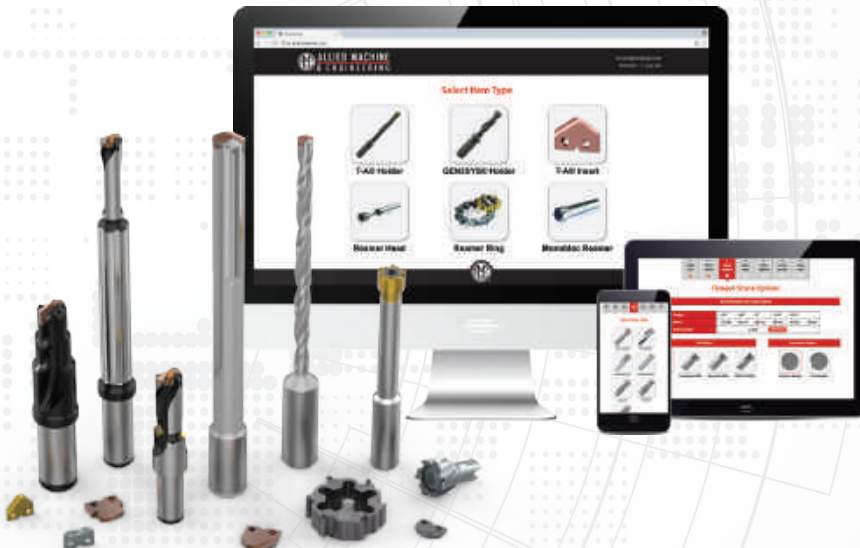

iq.alliedmachine.com

Solution Hub App

All Allied all the time.

- Quickly look up product information
- Links to our free online tools
- Locate distributors
- Stay up to date on news and events



Machinist Tool App

Quickly convert cutting tool parameters for the machine inputs you need.

- Input data to calculate the RPM and speed and feed rates
- Also features the Boring Insert Selector
- Access product literature right at your fingertips



Customer Support

Support You Can Count On

Allied Machine has many lines of support to ensure we're available to assist you at all times. It's important to establish relationships with new customers, but we also know it's equally important to strengthen and support relationships with existing customers. Whether you need help with an order or you need someone to come assist you at the spindle, we have the right people to get you what you need.



1

Inside Sales Support

Our inside sales team is trained to handle your account information and general inquiries. We are happy to assist you and find the answers to your questions.

☎ 1.330.343.4283 ext. 8610

☎ 1.800.321.5537 (toll free United States and Canada)

✉ insidesales@alliedmachine.com



2


Engineering Support

Our highly trained and skilled Application Engineers are here to assist you. If you are experiencing technical difficulties, our engineers will recommend the best solutions to the problem. Speeds and feeds, coolant pressure, and other machining components all affect the performance of our tooling. Our AEs are experienced in working with difficult materials in many different environments. Give us a call and put our knowledge to the test.

☎ 1.330.343.4283 ext. 7611

☎ 1.800.321.5537 (toll free United States and Canada)

✉ appeng@alliedmachine.com

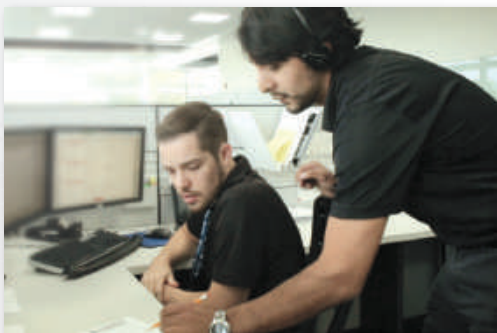

3

Field Support

Allied Machine provides local engineering support all over the world. Our Field Sales Engineers (FSEs) spend months training in-house before going to the field. This support line allows us to provide assistance to our customers right at the spindle. They are available to visit your facility, run demos and tests, and work hand-in-hand with machine operators and engineers to find the best possible tooling solutions.

NOTE: If you do not know your local FSE, please contact us

☎ 1.330.343.4283

☎ 1.800.321.5537 (toll free United States and Canada)

✉ info@alliedmachine.com





Allied Tool Academy

Online | On-site Technical Education Seminar (TES) | LIVE (Broadcasting)

Online Training

Get **all** the tooling training of our 3-day in-person Technical Education Seminar (TES) through the online **Allied Tool Academy** training platform. Level up your tooling IQ through a series of product overviews, demos, and short quizzes.

- Online TES Certification as well as other training modules
- On demand
- On YOUR schedule



Register online today:
www.alliedtoolacademy.com



Register online today:
www.alliedmachine.com/live

Allied LIVE (Broadcasting)

Join us for **LIVE broadcast** training events where you will have the ability to learn about our tooling, watch live demos, and ask our trainers questions.

- Online
- Quick brief presentation provides basic knowledge of our products
- Watch live demos of tools at the spindle at different speeds and feeds

On-site Technical Education Seminar (TES)

Allied Machine's **Technical Education Seminar (TES)** puts the attendees in front of the machines. When you attend our three day TES program, you'll gain first-hand experience in **real-life** application situations. Test and experiment with different speeds and feeds, observe the results, and discover the best solution.

- Training Lab: In-depth training at the spindle allows you to choose speeds and feeds
- Learning Lab: Quick, brief sessions provide basic knowledge of our products
- Facility Tours: Take guided tours of our two manufacturing facilities located in Dover, Ohio



Register online today:
www.alliedmachine.com/TES



Allied Machine
Training Facility
485 West 3rd Street
Dover, OH 44622



Find what you need. Now.

Flipbooks give you the ability to search for specific item numbers, download PDFs, print pages, and share with others. Save time searching the catalog by hand by using the easy search function. View our flipbooks now at alliedmachine.com/support/literature.

The diagram illustrates the features and navigation of the Allied Machine Engineering flipbook interface. The main interface shows a flipbook with a sidebar menu and a search bar. The search bar is highlighted, and a search results window is shown, displaying the search term "D2031200M-075F" and the results "1 page found." The search results window also displays the page number "p. 20" and the dimensions "72 12.00 0.945 1.787 3.480 0.750 1.063 0.020 D2031200M-075F 0.492 12.50 0.984 1.827 3.520 ...".

The main interface also includes a sidebar menu with the following sections:

- Table of Contents
- Product Overview
- Drill Series
- Accessories
- Technical Information
- Recommended Cutting Data
- Troubleshooting
- Guaranteed Test / Demo Application
- Remanufacture

The main interface also includes a search bar and a navigation bar at the bottom. The navigation bar includes icons for:


- View the table of contents.
- Scroll through the pages in thumbnail view.
- Add notes.
- Mute the sound.
- Zoom in for a closer look.
- View in full screen mode.
- Share the Flipbook with others.
- Download the catalog PDF.
- Print the full catalog or specific pages.

The diagram also shows a "Share" window with a QR code and a link to the flipbook: <https://alliedmachine.cld.bz/ATEX-Drill>. The "Share" window also includes a "Copy" button and social media sharing options (Facebook, Twitter, LinkedIn, Email).

The diagram also shows a "Print" window with the text: "Please, choose what you want to print: Current Left Page (0.21 MB). Click print button, wait for the file to download and send it to printing." The "Print" window also includes a "Print" button.

Share the link to each Flipbook via email and social media.

Icon Reference Guide

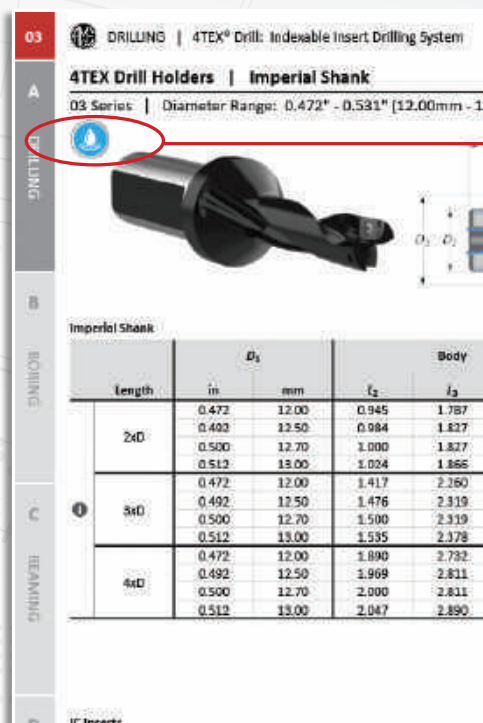

Navigate with ease.

The following icons will appear throughout the catalog to help you navigate between products and find the best solution quickly.

Coating Options

AM200

AM200 Coating

AM300

AM300 Coating

AM210

AM210 Coating

AM420

AM420 Coating

TiCN

TiCN Coating

TiN

TiN Coating

TiAlN

TiAlN Coating

Tool Options

Straight
Shank

Straight Shank

Morse
Taper

Morse Taper Shank



Coolant Through

Criterion® Modular Boring Systems

MBS | CBS | MDS | Cri-Bore® | Large Cri-Bore® | CB Style



CRITERION®

Boring holes doesn't have to be boring.

Criterion modular boring systems bring speed, tolerance, toughness, and versatility to your boring applications.

The MBS finish boring tool is ideal for small diameter bores and high spindle speeds to bore quickly and efficiently.

The Cri-Bore boring system is designed for finish boring applications and can be used for extremely tight tolerances. When the tolerance is tight, the Cri-Bore can be adjusted in 0.00005" (fifty-millionths).

The versatile CB style boring heads are available in both micro adjusting and standard. Made for maximum toughness, the CB style boring head can produce a wide range of diameters.

Your safety and the safety of others is very important. This catalog contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalog, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalog. Safety messages follow these words.

WARNING

WARNING (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

NOTICE means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

NOTE and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit www.alliedmachine.com for the most up-to-date information and procedures.



Aerospace



Agriculture



Automotive



Firearms




Renewable
Energy


Criterion® Modular Boring Systems Contents

Reference Icons


The following icons will appear throughout the catalog to help you navigate between products.




Boring Heads - Insert Holders
Micro adjusting boring heads that use inserts for cutting



Boring Heads - Boring Bar Holders
Standard and micro adjusting boring heads that use boring bars for cutting




Head-to-Shank Adapters
Extensions and reducers that attach the boring head to the shank



Shanks
A variety of shanks for different machines



Setup / Assembly Information
Detailed instructions and information regarding the corresponding part(s)



Recommended Cutting Data
Speed and feed recommendations for optimum and safe boring

MBS Finish Boring Tools 2 - 6

CBS Finish Boring Tools 8 - 11

MDS Finish Boring Tools 12 - 13

Cri-Bore® Micro Adjusting Finish Boring Heads 14 - 16

Large Cri-Bore® Finish Boring / OD Turning System 16 - 23

CB Style Versatile Finish Boring Heads 24 - 43

Intermediate Modules 44 - 45

Master Shanks 46 - 50

Parts & Accessories 51 - 52

Technical Information 53 - 55

Guidelines / Troubleshooting

Guidelines to Not Exceed Recommended Length 56

Calculating Tool Assembly Weight 57

Recommended Cutting Data 58 - 59

Series	Bore Diameter Range	
	Imperial (inch)	Metric (mm)
MBS Finish Boring Tools	0.050" - 0.750"	—
CBS Finish Boring Tools	0.050" - 0.750"	—
MDS Finish Boring Tools	0.710" - 1.280"	18.00mm - 33.00mm
Cri-Bore® Micro Adjusting Finish Boring Heads	1.050" - 5.065"	27.00mm - 128.00mm
Large Cri-Bore® Finish Boring / OD Turning System	5.000" - 12.125"	127.00mm - 308.00mm
CB Style Versatile Finish Boring Heads	0.250" - 21.500"	—



WE KNOW

SPEED MATTERS

MBS Finish Boring Tool

Ideal for small diameter bores and high spindle speeds


Compact design great for live tooling

Cylindrical shank can be dropped into existing tool holders



MBS Finish Boring Tool


Bore Diameter Range: 0.050" - 0.750"

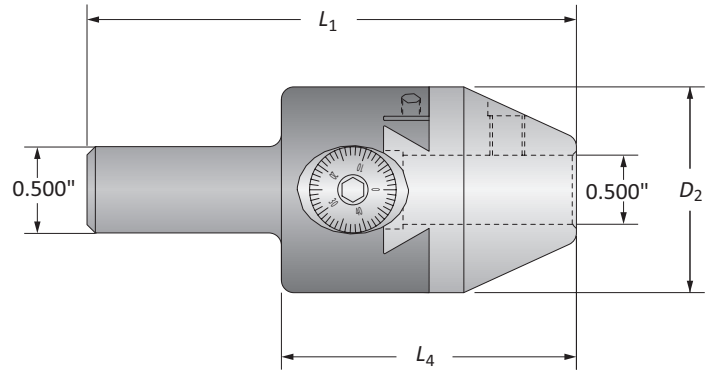

		Boring Head				
Boring Range		L_1	L_4	D_2	Weight	Part No.
i	0.050 - 0.750	3.500	2.125	1.500	0.900 (lbs)	MBS0500B

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.


Imperial (in) = 0.001" adjustment on diameter

NOTE: Max spindle speed: 7,000 RPM at 0 radial offset**i** = Imperial (in)
m = Metric (mm)**IMPORTANT:** Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com



Mini Coated Boring Tools


Bore Diameter Range: 0.050" - 0.275"

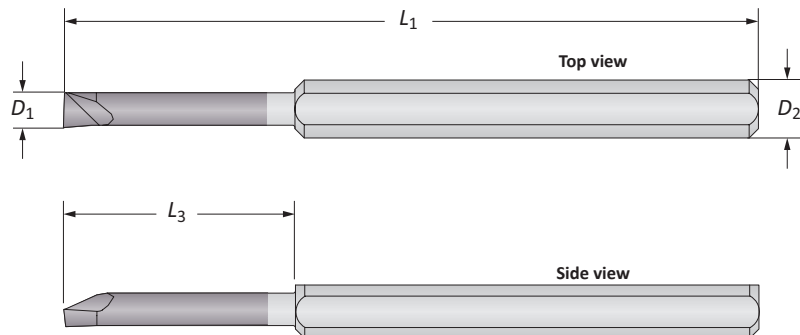

Mini Coated Boring Bars



Min. Boring Diameter		Boring Bar				
D_1		L_3	L_1	D_2	Weight	Part No.
i	0.050	0.300	1.500	0.125*	0.010 (lbs)	0050GA
	0.060	0.300	1.500	0.125*	0.010 (lbs)	0060GA
	0.080	0.500	1.500	0.125*	0.010 (lbs)	0080GA
	0.100	0.600	1.500	0.125*	0.010 (lbs)	0100GA
	0.110	0.700	1.500	0.125*	0.010 (lbs)	0110GA
	0.120	0.750	2.500	0.250*	0.020 (lbs)	0120HA
	0.140	0.750	2.500	0.250*	0.020 (lbs)	0140HA
	0.160	0.875	2.500	0.250*	0.020 (lbs)	0160HA
	0.180	1.125	2.500	0.250*	0.020 (lbs)	0180HA
	0.200	1.250	2.500	0.250*	0.020 (lbs)	0200HA

*Reducing sleeve required

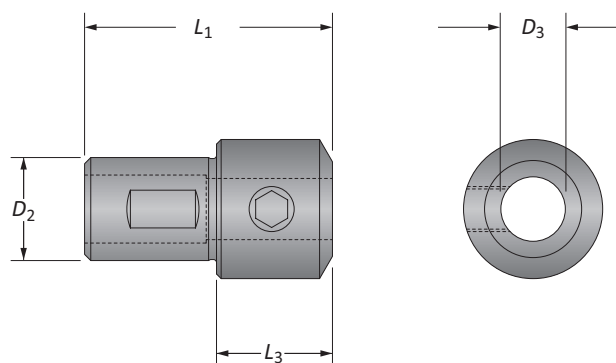

Reducing Sleeves


Reducing Sleeve						
	D_3	D_2	L_1	L_3	Weight	Part No.
i	0.125	0.500	2.000	0.220	0.100 (lbs)	BTH-01250500
	0.250	0.500	1.312	—	0.050 (lbs)	BTH-02500500



i = Imperial (in)
m = Metric (mm)


Boring Bars

Bore Diameter Range: 0.250" - 0.750"

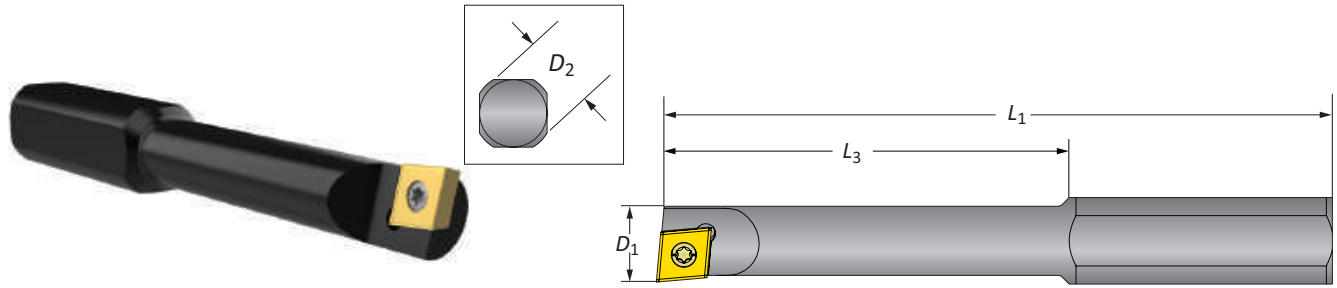

Steel Boring Bars | Bore Diameter Range: 0.250" - 0.750"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.250	1.062	2.500	0.500	0.080 (lbs)	WBGX0301..	0250B
	0.312	1.437	2.750	0.500	0.080 (lbs)	WBGX0301..	0312B
	0.375	1.750	3.062	0.500	0.100 (lbs)	WBGX0301..	0375B
	0.437	2.062	3.375	0.500	0.110 (lbs)	CC..215..	0437B
	0.500	2.187	3.500	0.500	0.140 (lbs)	CC..215..	0500B

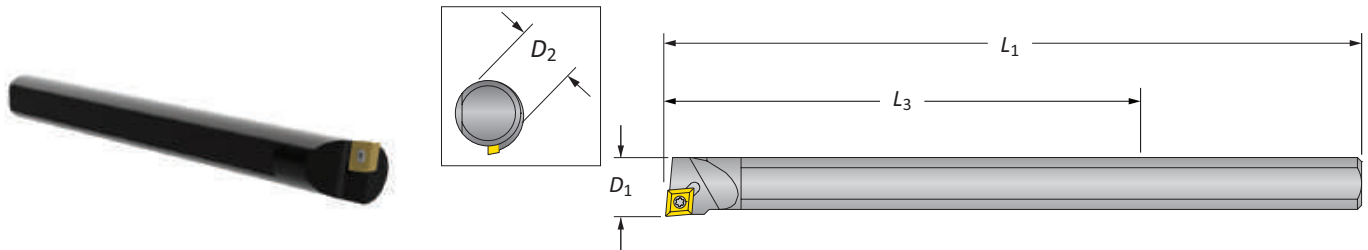

Heavy Metal Boring Bars | Bore Diameter Range: 0.365" - 0.750"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.365	2.250	4.000	0.312*	0.080 (lbs)	CC..215..	0365HM
	0.550	3.250	6.000	0.500	0.300 (lbs)	CC..215..	0550BHM



*Reducing sleeve required

Carbide Boring Bars | Bore Diameter Range: 0.625" - 0.750"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.625	4.500	8.000	0.500	0.410 (lbs)	CC..215..	0625BCS

Reducing Sleeves

Reducing Sleeve				Weight	Part No.
D_3	D_2	L_1	L_3		
i 0.312	0.500	1.312	—	0.040 (lbs)	BTH-03120500
i 0.375	0.500	1.312	—	0.030 (lbs)	BTH-03750500

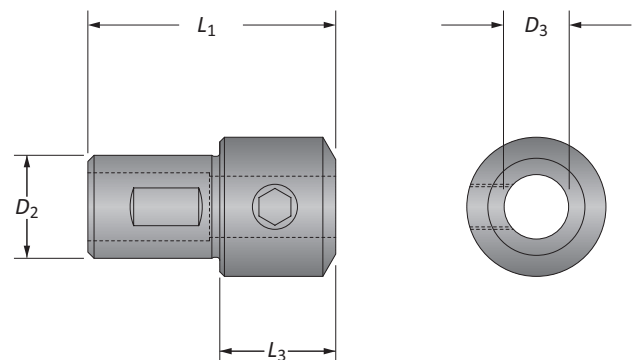

i = Imperial (in)
m = Metric (mm)
Inserts sold separately



A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E


THREADING

X

SPECIALS


Boring Inserts

Trigon | 80° Diamond

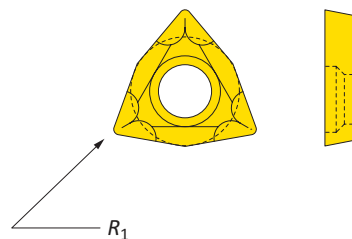



Coated Trigon Insert

Insert Form		Insert	Part No.
		R_1	
i	WBGX0301..	0.004	WBGX030101

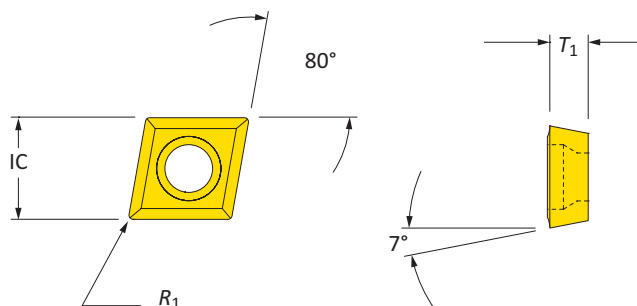

Coated 80° Diamond Insert

Insert Form		Insert			Part No.
		IC	T_1	R_1	
i	CC..215..	0.250	0.094	0.008	CCMT060202



i = Imperial (in)
m = Metric (mm)

Inserts sold separately



WE KNOW REACH MATTERS

CBS Finish Boring Tool

Ease the stress of reaching past fixturing

Ideal for small diameter bores with long overhangs


Cylindrical shank can be dropped into existing endmill
(side-lock) holders





CBS Finish Boring Tool

Bore Diameter Range: 0.050" - 0.750"

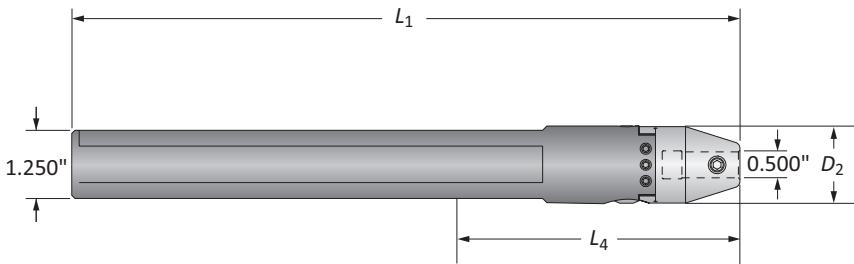

		Boring Head			Weight	Part No.
Boring Range		L ₁	L ₄	D ₂		
i 0.050 - 0.750		10.600	8.320	1.250	3.100 (lbs)	CBS1250B

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.
Imperial (in)= 0.001" adjustment on diameter
NOTE: Max spindle speed: 3,500 RPM at 0 radial offset

B20: 62 - 63

B20: 57 - 59


i = Imperial (in)
m = Metric (mm)

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com



Mini Coated Boring Tools


Bore Diameter Range: 0.050" - 0.275"

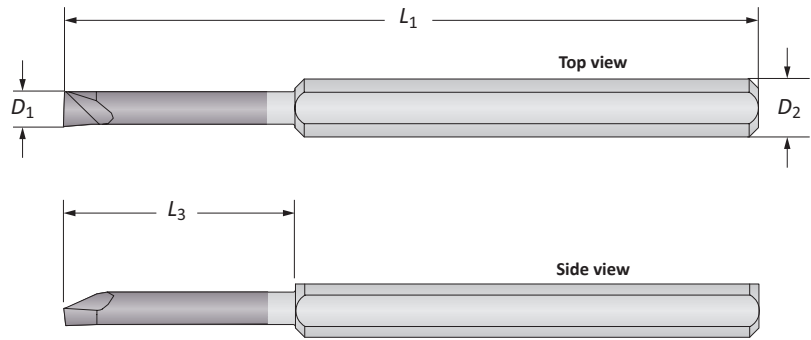

Mini Coated Boring Tools

Min. Boring Diameter	Boring Bar				Weight	Coated Part No.
	D_1	L_3	L_1	D_2		
i	0.050	0.300	1.500	0.125*	0.010 (lbs)	0050GA
	0.060	0.300	1.500	0.125*	0.010 (lbs)	0060GA
	0.080	0.500	1.500	0.125*	0.010 (lbs)	0080GA
	0.100	0.600	1.500	0.125*	0.010 (lbs)	0100GA
	0.110	0.700	1.500	0.125*	0.010 (lbs)	0110GA
	0.120	0.750	2.500	0.250*	0.020 (lbs)	0120HA
	0.140	0.750	2.500	0.250*	0.020 (lbs)	0140HA
	0.160	0.875	2.500	0.250*	0.020 (lbs)	0160HA
	0.180	1.125	2.500	0.250*	0.020 (lbs)	0180HA
	0.200	1.250	2.500	0.250*	0.020 (lbs)	0200HA

*Reducing sleeve required

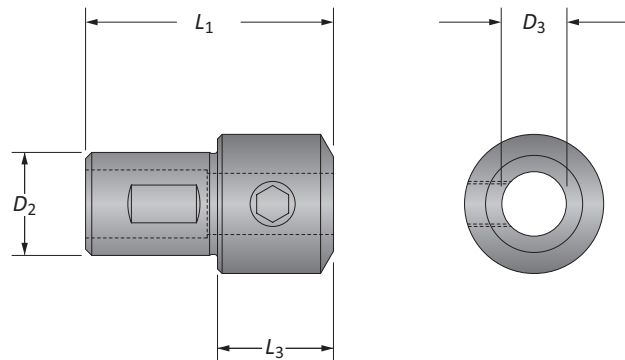


Reducing Sleeves

	Reducing Sleeve				Weight	Part No.
	D_3	D_2	L_1	L_3		
i	0.125	0.500	2.000	0.220	0.100 (lbs)	BTH-01250500
	0.250	0.500	1.312	—	0.050 (lbs)	BTH-02500500
	0.375	0.500	1.312	—	0.030 (lbs)	BTH-03750500

B20: 62 - 63


B20: 57 - 59



i = Imperial (in)
m = Metric (mm)


Steel Boring Bars | Boring Inserts

Bore Diameter Range: 0.250" - 0.750"

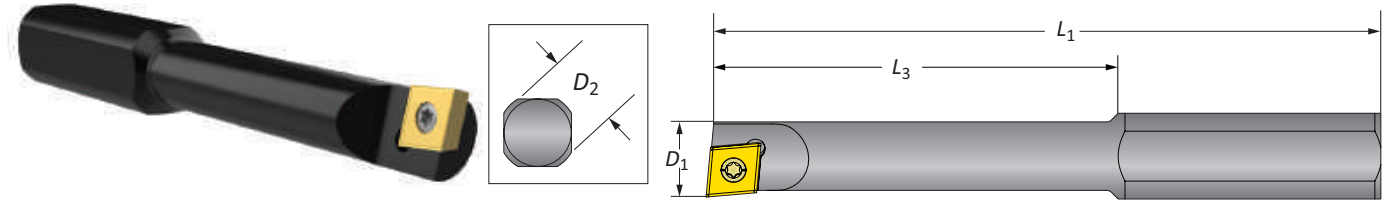


Steel Boring Bars

	Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.250	1.062	2.500	0.500	0.080 (lbs)	WBGX0301...	0250B
	0.312	1.437	2.750	0.500	0.080 (lbs)	WBGX0301...	0312B
	0.375	1.750	3.062	0.500	0.100 (lbs)	WBGX0301...	0375B
	0.437	2.062	3.375	0.500	0.110 (lbs)	CC..215..	0437B
	0.500	2.187	3.500	0.500	0.140 (lbs)	CC..215..	0500B

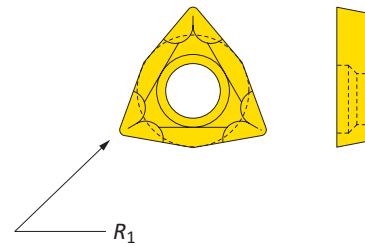


Coated Trigon Insert

Insert		Part No.
Insert Form	R_1	
i WBGX0301...	0.004	WBGX030101

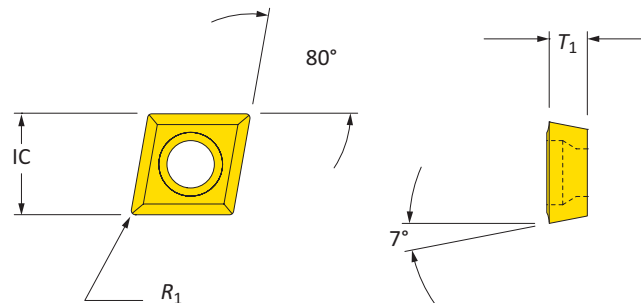

Coated 80° Diamond Insert

Insert		Part No.
Insert Form	IC T_1 R_1	
i CC..215..	0.250 0.094 0.008	CCMT060202



i = Imperial (in)
m = Metric (mm)
Inserts sold separately



WE KNOW

CONVENIENCE MATTERS

MDS Finish Boring Tool


Compact design and rugged insert holder make it one of the toughest boring tools under 1.000" (25.4mm) diameter

Cylindrical shank can be dropped into existing endmill (side-lock) holders

Available in both imperial (in) and metric (mm) versions

MDS Finish Boring Tools | Boring Inserts

Bore Diameter Range: 0.710" - 1.280" (18.00mm - 33.00mm)

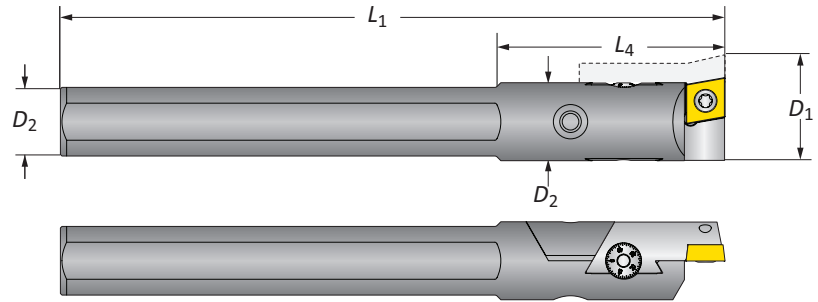


	Boring Range		Shank Diameter		Boring Head		Weight	Insert Form	Part No.
	D_1		D_2		L_1	Max L_4			
i	0.710 - 0.960		0.625		5.250	3.386	0.400 (lbs)	CC..215..	MDS0625
	0.890 - 1.280		0.750		6.310	4.435	0.700 (lbs)	CC..325..	MDS0750
m	18.00 - 24.25		16.00		133.00	85.37	0.18 (kg)	CC..0602..	MDS16M
	22.00 - 33.00		20.00		160.00	112.37	0.32 (kg)	CC..09T3..	MDS20M

Imperial (in) = 0.001" adjustment on diameter


Metric (mm) = 0.020mm adjustment on diameter

NOTE: Max spindle speed: 1,000 SFM (305 M/Min) at 0 radial offset

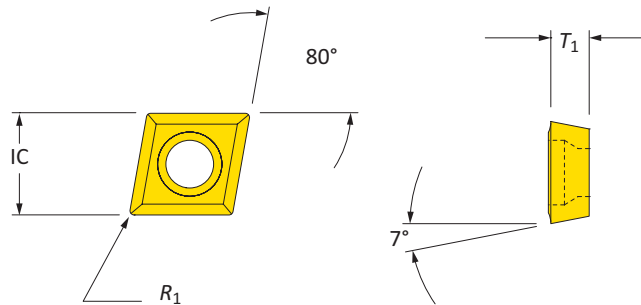

Coated 80° Diamond Inserts

	Insert				Part No.
	Insert Form	IC	T_1	R_1	
i	CC..215..	0.250	0.094	0.008	CCMT060202
	CC..325..	0.375	0.156	0.008	CCMT09T302
	CC..325..	0.375	0.156	0.016	CCMT09T304
m	CC..0602..	6.35	2.38	0.20	CCMT060202
	CC..09T3..	9.53	3.97	0.20	CCMT09T302
	CC..09T3..	9.53	3.97	0.40	CCMT09T304



i = Imperial (in)
m = Metric (mm)

Inserts sold separately

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.

ext: 7611 | email: appeng@alliedmachine.com



WE KNOW

TOLERANCE MATTERS

Cri-Bore[®] Micro Adjusting

Allows for 0.00005" (0.001mm) on diameter bore increments

Modular system can be used on virtually any machine


Available in both imperial (in) and metric (mm) versions





Cri-Bore® Micro Adjusting Finish Boring Heads

Bore Diameter Range: 1.050" - 5.065" (27.00mm - 128.00mm)

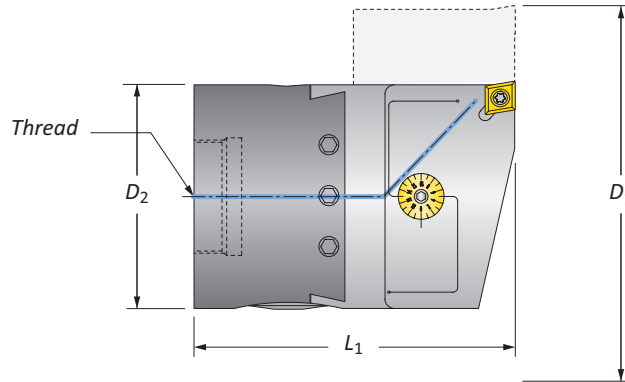


Boring Range		Boring Head		Weight	Insert Form	Part. No
D_1	Thread Connection	L_1	D_2			
i	1.050 - 1.320	$\frac{1}{8}$ - 20	2.690	1.000	0.500 (lbs)	CC..215..
	1.050 - 1.320	$\frac{1}{8}$ - 20	2.690	1.000	0.500 (lbs)	TC..215..
	1.300 - 1.600	$\frac{1}{8}$ - 20	2.900	1.250	0.800 (lbs)	CC..215..
	1.300 - 1.600	$\frac{1}{8}$ - 20	2.900	1.250	0.800 (lbs)	TC..215..
	1.585 - 2.700	$\frac{1}{8}$ - 20	3.200	1.500	1.300 (lbs)	CC..325..
	1.585 - 2.700	$\frac{1}{8}$ - 20	3.200	1.500	1.300 (lbs)	TC..325..
	2.060 - 3.320	$\frac{1}{8}$ - 20	3.590	2.000	2.400 (lbs)	CC..325..
	2.060 - 3.320	$\frac{1}{8}$ - 20	3.590	2.000	2.400 (lbs)	TC..325..
	3.065 - 5.065	$1\frac{1}{2}$ - 18	4.100	3.000	5.800 (lbs)	CC..325..
	3.065 - 5.065	$1\frac{1}{2}$ - 18	4.100	3.000	5.800 (lbs)	TC..325..
m	27.00 - 33.00	$\frac{1}{8}$ - 20	68.35	25.00	0.23 (kg)	CC..0602..
	27.00 - 33.00	$\frac{1}{8}$ - 20	68.35	25.00	0.23 (kg)	TC..1102..
	33.00 - 41.00	$\frac{1}{8}$ - 20	73.65	32.00	0.36 (kg)	CC..0602..
	33.00 - 41.00	$\frac{1}{8}$ - 20	73.65	32.00	0.36 (kg)	TC..1102..
	41.00 - 68.00	$\frac{1}{8}$ - 20	81.25	38.00	0.59 (kg)	CC..09T3..
	41.00 - 68.00	$\frac{1}{8}$ - 20	81.25	38.00	0.59 (kg)	TC..16T3..
	53.00 - 84.00	$\frac{1}{8}$ - 20	91.30	50.00	1.09 (kg)	CC..09T3..
	53.00 - 84.00	$\frac{1}{8}$ - 20	91.30	50.00	1.09 (kg)	TC..16T3..
	78.00 - 128.00	$1\frac{1}{2}$ - 18	104.25	76.00	2.36 (kg)	CC..09T3..
	78.00 - 128.00	$1\frac{1}{2}$ - 18	104.25	76.00	2.36 (kg)	TC..16T3..

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.

Imperial (in) = 0.00005" adjustment on diameter

Metric (mm) = 0.001mm adjustment on diameter

NOTE: Max spindle speed: 1,000 SFM (305 M/Min) at 0 radial offset

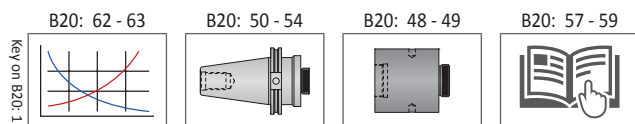

i = Imperial (in)
m = Metric (mm)


Inserts sold separately

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.


ext: 7611 | email: appeng@alliedmachine.com

**Boring Inserts**



80° Diamond Insert | 60° Triangle Insert

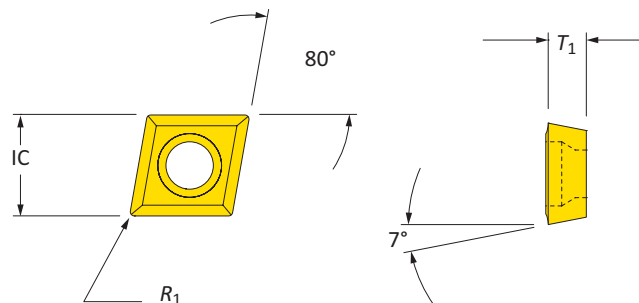**Coated 80° Diamond Inserts**

		Insert			Part No.
	Insert Form	IC	T ₁	R ₁	
i	CC...215..	0.250	0.094	0.008	CCMT060202
	CC...215..	0.250	0.094	0.016	CCMT060204
	CC...325..	0.375	0.156	0.008	CCMT09T302
	CC...325..	0.375	0.156	0.016	CCMT09T304
m	CC...0602..	6.35	2.38	0.20	CCMT060202
	CC...0602..	6.35	2.38	0.40	CCMT060204
	CC...09T3..	9.53	3.97	0.20	CCMT09T302
	CC...09T3..	9.53	3.97	0.40	CCMT09T304

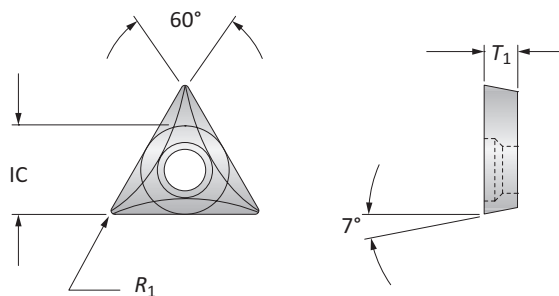**Coated 60° Triangle Inserts**

		Insert			Part No.
	Insert Form	IC	T ₁	R ₁	
i	TC...215..	0.250	0.094	0.008	TCGT110202
	TC...215..	0.250	0.094	0.016	TCGT110204
	TC...325..	0.375	0.156	0.016	TCGT16T304
m	TC...1102..	6.35	2.38	0.20	TCGT110202
	TC...1102..	6.35	2.38	0.40	TCGT110204
	TC...16T3..	9.53	3.97	0.40	TCGT16T304



i = Imperial (in)
m = Metric (mm)

Inserts sold separately



EXTEND YOUR BORING RANGE

Large Cri-Bore[®] Finish Boring / OD Turning System

Extend the diameter range for internal and external boring

Modular tooling system allows for CAT, BT, or HSK shanks


Allows for 0.00005" (0.001mm) on diameter bore increments



Large Cri-Bore® Finish Boring / OD Turning System



Cri-Bore Boring Head / Optional Component Combinations

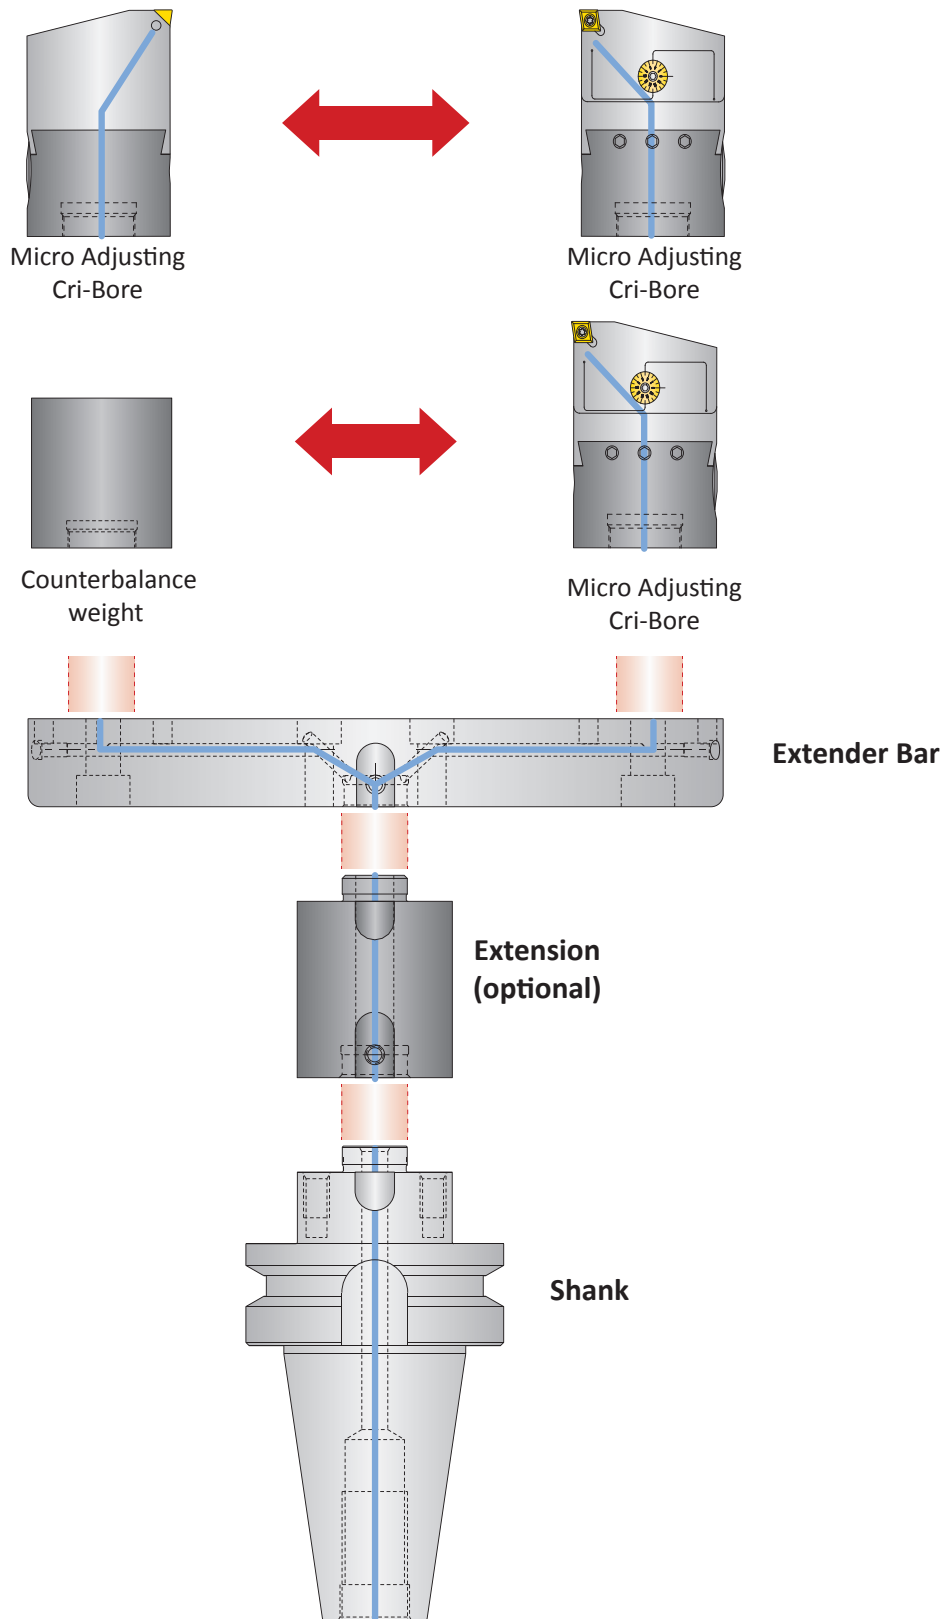


WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

Cri-Bore Micro Adjusting Finish Boring Heads | Counter Weights

Bore ID Range: 5.000" - 12.125" (127.00mm - 307.90mm) | Bore OD Range: 0.710" - 7.830" (18.10mm - 198.80mm)

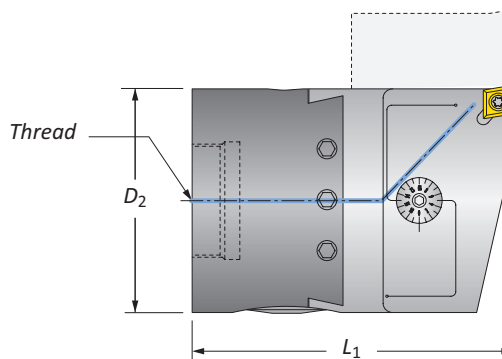

Cri-Bore Micro Adjusting Boring Heads

	Connection Thread	Boring Head		Weight	Insert Form	Part No.
		L_1	D_2			
i	$\frac{7}{8}$ - 20	3.200	1.500	1.300 (lbs)	CC..325..	CB1500CC
	$\frac{7}{8}$ - 20	3.200	1.500	1.300 (lbs)	TC..325..	CB1500TC
m	$\frac{7}{8}$ - 20	81.25	38.00	0.59 (kg)	CC..09T3..	CB038MCC
	$\frac{7}{8}$ - 20	81.25	38.00	0.59 (kg)	TC..16T3..	CB038MTC

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.

Imperial (in) = 0.00005" adjustment on diameter


Metric (mm) = 0.001mm adjustment on diameter

NOTE: Max spindle speed ID boring: 1,000 SFM (305 M/Min) at 0 radial offset and used with counter weight or additional boring head


NOTE: Max spindle speed OD boring: Contact our Application Engineering department

Large Cri-Bore Counter Weights

	Counter Weight		Weight	Part No.
	D_2	L_1		
i	1.500	2.580	1.250 (lbs)	LCB1500-CBWTa
m	38.10	65.53	0.57 (kg)	LCB1500-CBWTa



B20: 62 - 63



B20: 57 - 59



i = Imperial (in)

m = Metric (mm)

Inserts sold separately

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.

ext: 7611 | email: appeng@alliedmachine.com

WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:



- Refer to page B20: 61 to see formula for calculating weight of tool assembly.

- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department.

**Large Cri-Bore® Finish Boring / OD Turning System Extender Bars | Extensions**


Bore ID Range: 5.000" - 12.125" (127.00mm - 307.90mm) | Bore OD Range: 0.710" - 7.830" (18.10mm - 198.80mm)

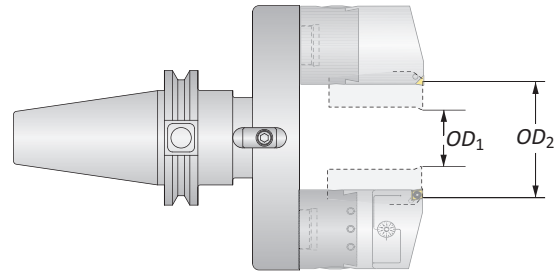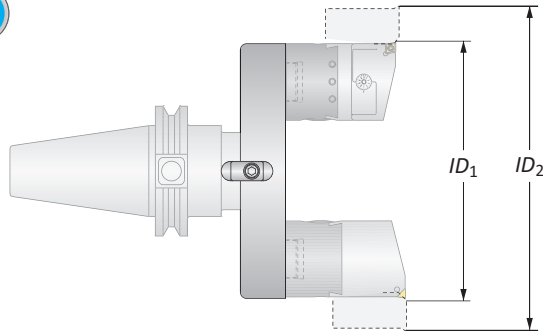**Large Cri-Bore Extender Bars**

Extender Bar					Weight	Part No.
	ID ₁	ID ₂	OD ₁	OD ₂		
i	5.000	6.125	0.710	1.830	1.560 (lbs)	LCB1500-56EBK
	6.000	7.125	1.710	2.830	1.920 (lbs)	LCB1500-67EBK
	7.000	8.125	2.710	3.830	2.290 (lbs)	LCB1500-78EBK
	8.000	9.125	3.710	4.830	2.650 (lbs)	LCB1500-89EBK
	9.000	10.125	4.710	5.830	3.010 (lbs)	LCB1500-910EBK
	10.000	11.125	5.710	6.830	3.370 (lbs)	LCB1500-1011EBK
	11.000	12.125	6.710	7.830	3.730 (lbs)	LCB1500-1112EBK
m	127.00	155.50	18.10	46.40	0.71 (kg)	LCB1500-56EBK
	152.40	180.90	43.50	71.80	0.87 (kg)	LCB1500-67EBK
	177.80	206.30	68.90	97.20	1.04 (kg)	LCB1500-78EBK
	203.20	231.70	94.30	122.60	1.20 (kg)	LCB1500-89EBK
	228.60	257.10	119.70	148.00	1.37 (kg)	LCB1500-910EBK
	254.00	282.50	145.10	173.40	1.53 (kg)	LCB1500-1011EBK
	279.40	307.90	170.50	198.80	1.69 (kg)	LCB1500-1112EBK


**Large Cri-Bore Extensions**

Extension		Weight	Part No.
D ₁	L ₁		
i	1.500	0.660 (lbs)	LCB1500-IA1500
	1.500	1.330 (lbs)	LCB1500-IA3000
	1.500	1.980 (lbs)	LCB1500-IA4500
m	38.10	0.30 (kg)	LCB1500-IA1500
	38.10	0.60 (kg)	LCB1500-IA3000
	38.10	0.90 (kg)	LCB1500-IA4500

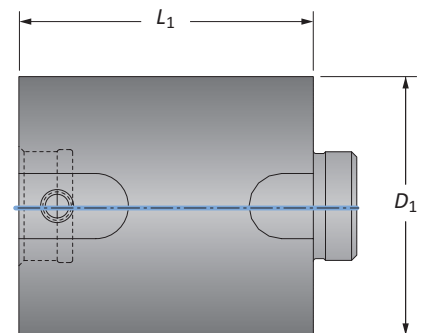NOTE: Only one extension can be used per boring assembly. Extensions cannot be combined.

B20: 62 - 63

B20: 57 - 59



i = Imperial (in)

m = Metric (mm)

Inserts sold separately


WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.


Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

Large Cri-Bore® Finish Boring / OD Turning System Shanks


Bore ID Range: 5.000" - 12.125" (127.00mm - 307.90mm) | Bore OD Range: 0.710" - 7.830" (18.10mm - 198.80mm)

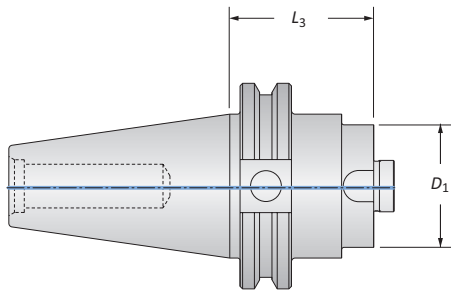


CAT40 Shank

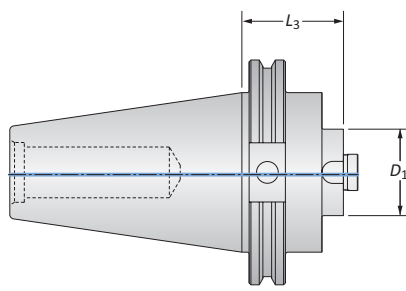

CAT50 Shank

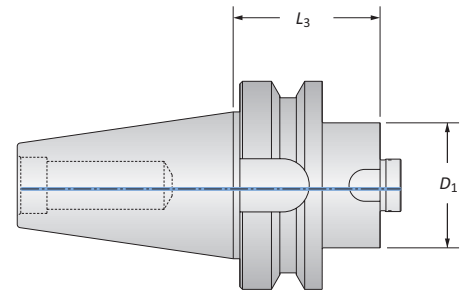


BT40 Shank

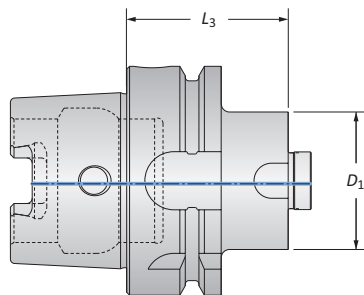

HSK63A Shank

Shank			Weight	Part No.
L_3	D_1	Taper		
1.750	1.500	CAT40	2.410 (lbs)	LCB1500-CV40
1.750	1.500	CAT50	6.960 (lbs)	LCB1500-CV50
1.750	1.500	BT40	2.460 (lbs)	LCB1500-BT40
1.750	1.500	HSK63A	1.750 (lbs)	LCB1500-HSK63A
44.45	38.10	CAT40	1.09 (kg)	LCB1500-CV40
44.45	38.10	CAT50	3.16 (kg)	LCB1500-CV50
44.45	38.10	BT40	1.12 (kg)	LCB1500-BT40
44.45	38.10	HSK63A	0.79 (kg)	LCB1500-HSK63A

B20: 62 - 63



B20: 57 - 59



i = Imperial (in)

m = Metric (mm)

Inserts sold separately


WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.


Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

Boring Inserts



80° Diamond Insert | 60° Triangle Insert

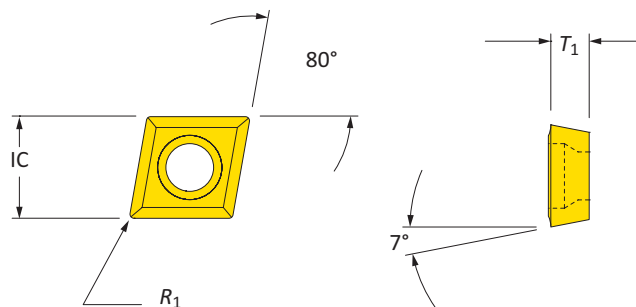**Coated 80° Diamond Inserts**

Insert Form		Insert			Part No.
		IC	T ₁	R ₁	
i	CC..325..	0.375	0.156	0.008	CCMT09T302
	CC..325..	0.375	0.156	0.016	CCMT09T304
	CC..325..	0.375	0.156	0.031	CCMT09T308
m	CC..09T3..	9.53	3.97	0.20	CCMT09T302
	CC..09T3..	9.53	3.97	0.40	CCMT09T304
	CC..09T3..	9.53	3.97	0.80	CCMT09T308

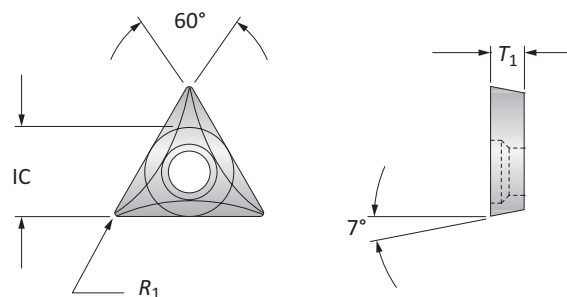**Coated 60° Triangle Inserts**

Insert Form		Insert			Part No.
		IC	T ₁	R ₁	
i	TC..325..	0.375	0.156	0.016	TCGT16T304
m	TC..16T3..	9.53	3.97	0.40	TCGT16T304



i = Imperial (in)
m = Metric (mm)
 Inserts sold separately



NEED VERSATILITY? NO PROBLEM.

CB Style Versatile Boring


Wide range of diameters produced with
a single boring head

Allows for 0.001" adjustment on bore diameter and
0.000050" with CB2500BMA

Maximum toughness and maximum versatility

CB2500BMA Micro Adjusting Versatile Boring Head


Bore Diameter Range: 0.250" - 3.125"

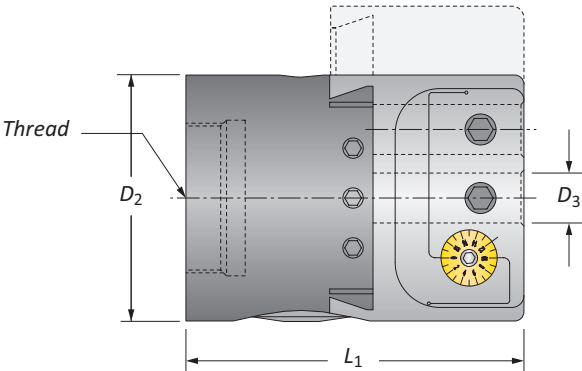


		Boring Head			Weight	Part No.
Boring Range	Thread Connection	L ₁	D ₂	D ₃		
i 0.250 - 3.125	1½ - 18	3.375	2.500	0.500	3.400 (lbs)	CB2500BMA

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.
Imperial (in) = 0.00005" adjustment on diameter
NOTE: Max spindle speed: 2,000 RPM at 0 radial offset


B20: 62 - 63



B20: 50 - 54



B20: 48 - 49



B20: 57 - 58



key on B20: 1





i = Imperial (in)
m = Metric (mm)
Inserts sold separately

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com



Boring Bars

Bore Diameter Range: 0.250" - 3.125"

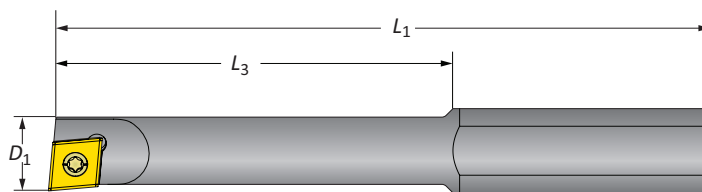

Steel Boring Bars | Bore Diameter Range: 0.250" - 3.125"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.250	1.062	2.500	0.500	0.080 (lbs)	WBGX0301..	0250B
	0.312	1.437	2.750	0.500	0.080 (lbs)	WBGX0301..	0312B
	0.375	1.750	3.062	0.500	0.100 (lbs)	WBGX0301..	0375B
	0.437	2.062	3.375	0.500	0.110 (lbs)	CC..215..	0437B
	0.500	2.187	3.500	0.500	0.140 (lbs)	CC..215..	0500B

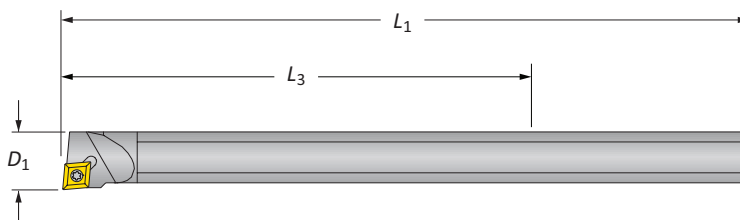





Heavy Metal Boring Bars | Bore Diameter Range: 0.365" - 3.125"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.365	2.250	4.000	0.312*	0.080 (lbs)	CC..215..	0365HM
	0.550	3.250	6.000	0.500	0.300 (lbs)	CC..215..	0550BHM

*Reducing sleeve required

Reducing Sleeves



Reducing Sleeve				Weight	Part No.
D_3	D_2	L_1	L_3		
i	0.312	0.500	1.312	0.040 (lbs)	BTH-03120500
	0.375	0.500	1.312	0.030 (lbs)	BTH-03750500

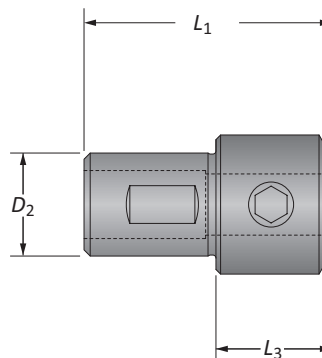

i = Imperial (in)
m = Metric (mm)

Boring Bar | Boring Inserts


Bore Diameter Range: 0.625" - 3.125"

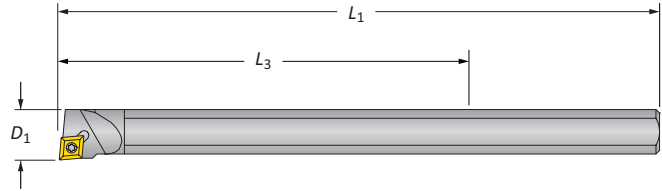**Carbide Boring Bar**




	Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.625	4.500	8.000	0.500	0.410 (lbs)	CC..215..	0625BCS

Coated Trigon Insert

	Insert Form	Insert	Part No.
		R_1	
i	WBGX0301..	0.004	WBGX030101

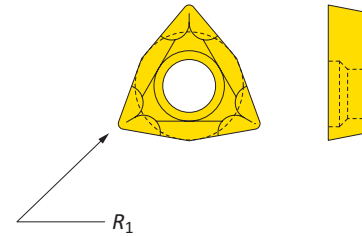**Coated 80° Diamond Inserts**


	Insert Form	Insert			Part No.
		IC	T_1	R_1	
i	CC..215..	0.250	0.094	0.008	CCMT060202
	CC..215..	0.250	0.094	0.016	CCMT060204
	CC..215..	0.250	0.094	0.031	CCMT060208

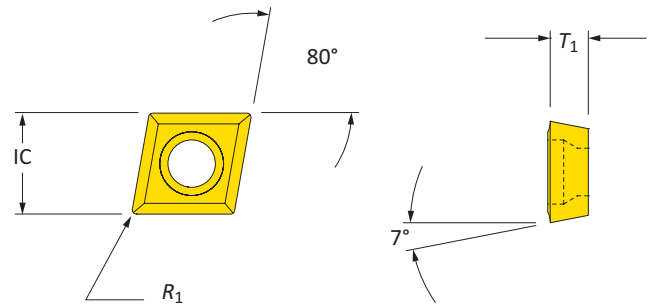

i = Imperial (in)
m = Metric (mm)
 Inserts sold separately

**CB202B Versatile Boring Head**

Bore Diameter Range: 0.250" - 6.687"

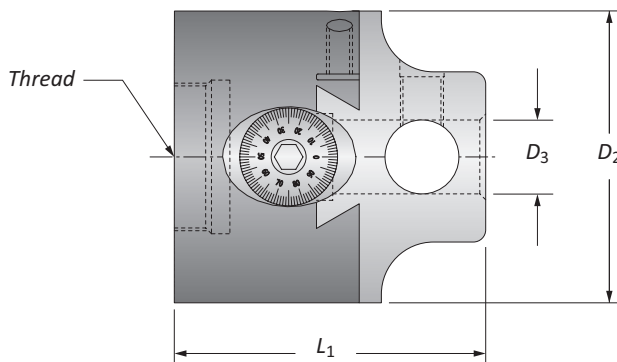


	Boring Range	Thread Connection	Boring Head			Weight	Part No.
			L_1	D_2	D_3		
i	0.250 - 6.687	$\frac{7}{8}$ - 20	2.435	2.000	0.500	1.600 (lbs)	CB202B

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.**NOTICE:** Cross hole bars should always be secured in the bar holder with at least two set screws


Imperial (in) = 0.001" adjustment on diameter

NOTE: Max spindle speed: 2,500 RPM at 0 radial offset


B20: 62 - 63



B20: 50 - 54



B20: 48 - 49




B20: 57 - 59

**i** = Imperial (in)
m = Metric (mm)**IMPORTANT:** Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.ext: **7611** | email: appeng@alliedmachine.com




Boring Bars

Bore Diameter Range: 0.250" - 3.000"

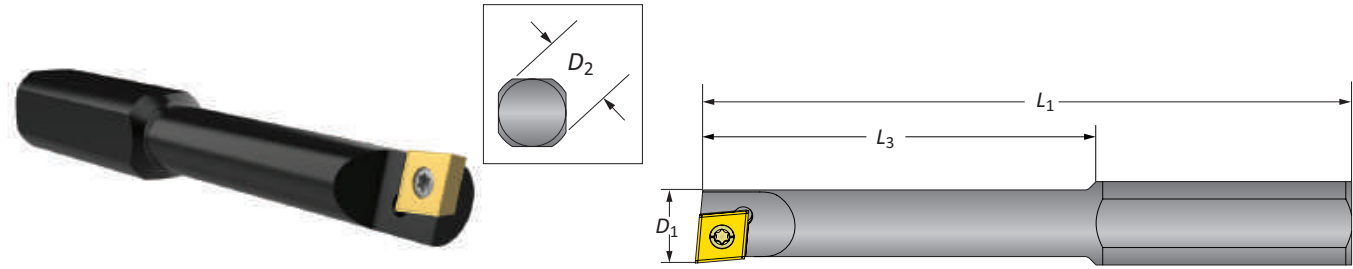

Steel Boring Bars | Bore Diameter Range: 0.250" - 3.000"

Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
	D_1	L_3	L_1			
i	0.250	1.062	2.500	0.080 (lbs)	WBGX0301..	0250B
	0.312	1.437	2.750	0.080 (lbs)	WBGX0301..	0312B
	0.375	1.750	3.062	0.100 (lbs)	WBGX0301..	0375B
	0.437	2.062	3.375	0.110 (lbs)	CC..215..	0437B
	0.500	2.187	3.500	0.140 (lbs)	CC..215..	0500B

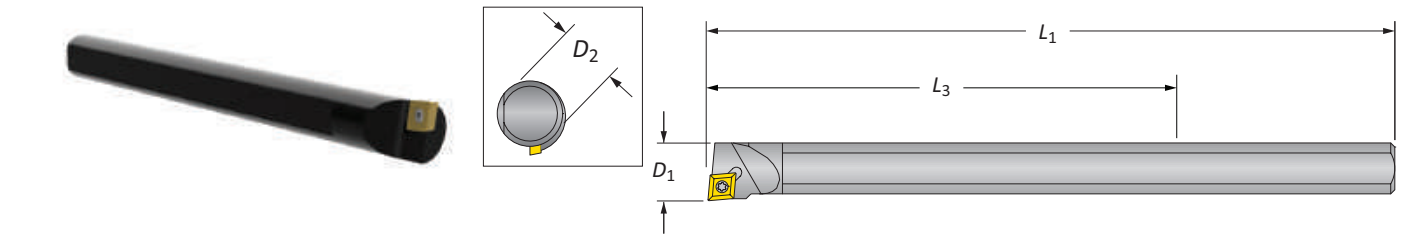

Heavy Metal Boring Bars | Bore Diameter Range: 0.365" - 3.000"

Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
	D_1	L_3	L_1			
i	0.365	2.250	4.000	0.080 (lbs)	CC..215..	0365HM
	0.550	3.250	6.000	0.300 (lbs)	CC..215..	0550BHM




*Reducing sleeve required

Carbide Boring Bar | Bore Diameter Range: 0.625" - 3.000"

Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
	D_1	L_3	L_1			
i	0.625	4.500	8.000	0.410 (lbs)	CC..215..	0625BCS

Reducing Sleeves

Reducing Sleeve				Weight	Part No.
D_3	D_2	L_1	L_3		
i 0.312	0.500	1.312	—	0.040 (lbs)	BTH-03120500
i 0.375	0.500	1.312	—	0.030 (lbs)	BTH-03750500

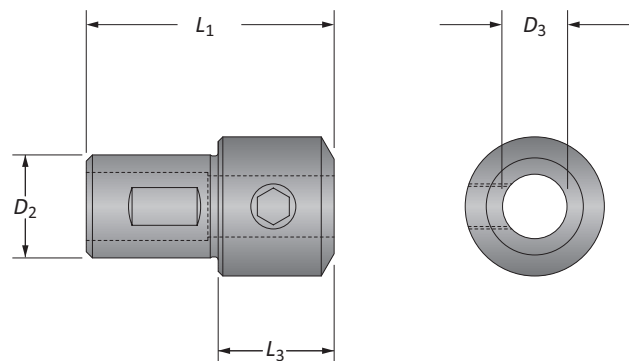

i = Imperial (in)
m = Metric (mm)



A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E


THREADING

X

SPECIALS



Boring Bar

Bore Diameter Range: 2.875" - 6.687"

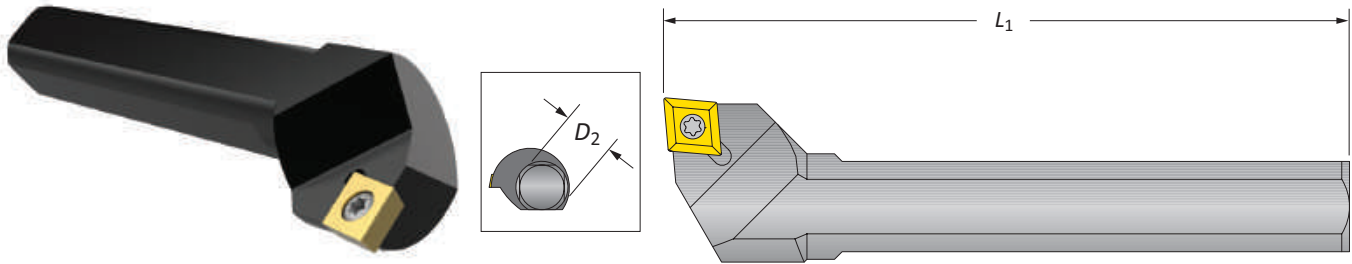

	Boring Bar*		Weight	Insert Form	Part No.
	Min. Boring Diameter	L_1			
i	2.875	2.750	0.140 (lbs)	CC..215..	0500BCH

***NOTICE:** Cross hole bars should always be secured in the bar holder with at least two set screws




i = Imperial (in)
m = Metric (mm)

Inserts sold separately




Boring Inserts

80° Diamond Insert | 60° Triangle Insert

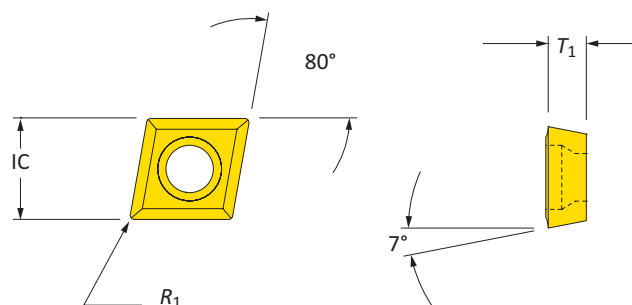

Coated 80° Diamond Inserts

Insert Form		Insert			Part No.
		IC	T ₁	R ₁	
i	CC..215..	0.250	0.094	0.008	CCMT060202
	CC..215..	0.250	0.094	0.016	CCMT060204
	CC..215..	0.250	0.094	0.031	CCMT060208

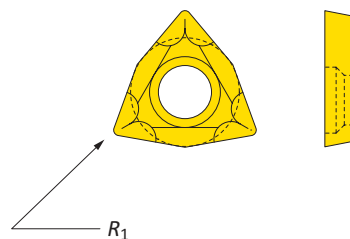


Coated Trigon Insert

Insert Form		Insert	Part No.
		R ₁	
i	WBGX0301..	0.004	WBGX030101

Key on B20: 1

B20: 62 - 63



B20: 57 - 59



i = Imperial (in)
m = Metric (mm)

Inserts sold separately

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E


THREADING

X

SPECIALS

**CB203D Versatile Boring Head**


Bore Diameter Range: 0.250" - 11.000"

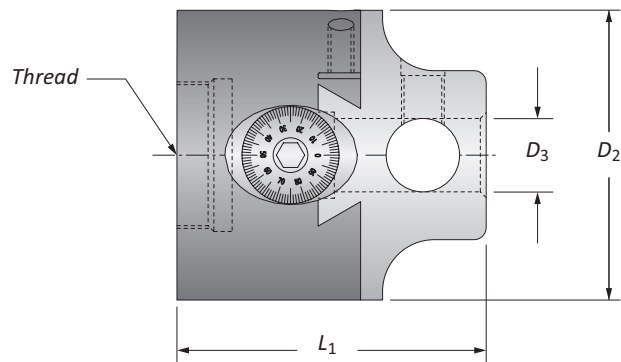

	Boring Range	Connection	Boring Head			Weight	Part No.
			L_1	D_2	D_3		
i	0.250 - 11.000	1½ - 18	3.166	3.000	0.750	4.700 (lbs)	CB203D

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.**NOTICE:** Cross hole bars should always be secured in the bar holder with at least two set screws

Imperial (in) = 0.001" adjustment on diameter

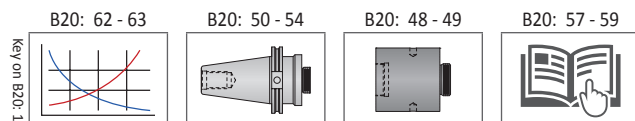NOTE: Max spindle speed: 1,750 RPM at 0 radial offset**i** = Imperial (in)
m = Metric (mm)

Inserts sold separately

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:



- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department.



Boring Bars



Bore Diameter Range: 0.250" - 5.125"

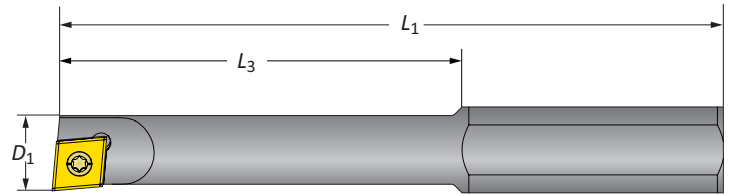

Steel Boring Bars | Bore Diameter Range: 0.250" - 5.125"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.250	1.062	2.500	0.500*	0.080 (lbs)	WBGX0301..	0250B
	0.312	1.437	2.570	0.500*	0.080 (lbs)	WBGX0301..	0312B
	0.375	1.750	3.062	0.500*	0.100 (lbs)	WBGX0301..	0375B
	0.437	2.062	3.375	0.500*	0.110 (lbs)	CC..215..	0437B
	0.500	2.500	4.250	0.750	0.280 (lbs)	CC..215..	0500D
	0.750	3.000	4.687	0.750	0.430 (lbs)	CC..325..	0750D
	1.000	3.500	5.125	0.750	0.570 (lbs)	CC..325..	1000D
	1.250	4.000	5.562	0.750	0.570 (lbs)	CC..325..	1250D

*Reducing sleeve required

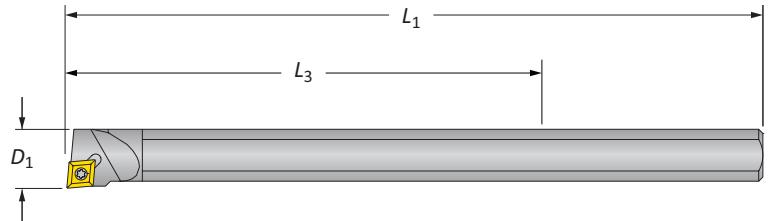




Heavy Metal Boring Bars | Bore Diameter Range: 0.425" - 4.250"

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.425	2.250	4.000	0.375*	0.110 (lbs)	CC..215..	0425BHM
	0.550	3.250	6.000	0.500*	0.300 (lbs)	CC..215..	0550BHM
	0.688	4.250	8.000	0.625*	0.630 (lbs)	CC..325..	0688CHM
	0.832	4.750	10.000	0.750	1.150 (lbs)	CC..325..	0832DHM

*Reducing sleeve required

Reducing Sleeves

Reducing Sleeve				Weight	Part No.
D_3	D_2	L_1	L_3		
0.375	0.750	2.406	—	0.190 (lbs)	BTH-03750750
0.500	0.750	2.406	0.910	0.040 (lbs)	BTH-05000750
0.625	0.750	1.500	—	0.060 (lbs)	BTH-06250750

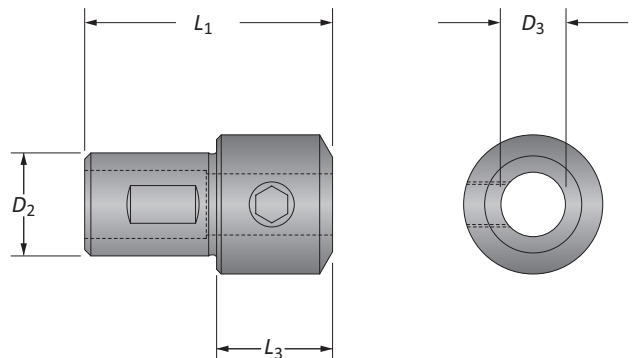

i = Imperial (in)

m = Metric (mm)

Inserts sold separately





A

DRILLING

Carbide Boring Bars

Bore Diameter Range: 0.625" - 4.250"

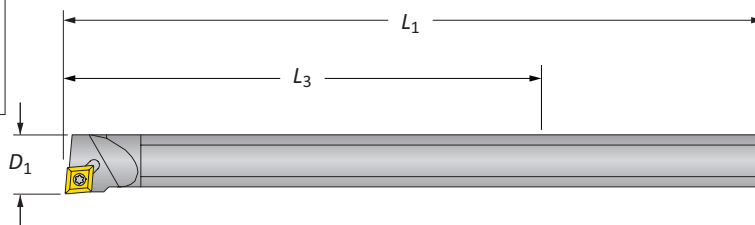

B

BORING



Carbide Boring Bars

Min. Boring Diameter		Boring Bar			Weight	Insert Form	Part No.
D_1	L_3	L_1	D_2				
i	0.625	4.500	8.000	0.500*	0.410 (lbs)	CC..215..	0625BCS
	0.875	6.000	10.000	0.750	1.130 (lbs)	CC..325..	0875DCS

*Reducing sleeve required

C

REAMING

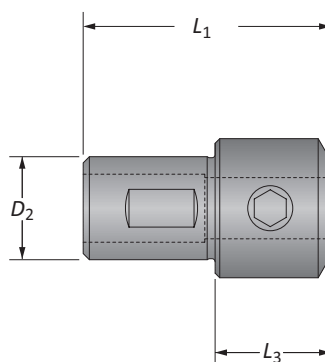

D

BURNISHING

Reducing Sleeve



Reducing Sleeve					Weight	Part No.
D_3	D_2	L_1	L_3			
i	0.500	0.750	2.406	0.910	0.040 (lbs)	BTH-05000750

E

THREADING

X

SPECIALS




i = Imperial (in)
m = Metric (mm)

Inserts sold separately



Cross Hole Boring Bar | Boring Inserts


Bore Diameter Range: 4.937" - 11.000"

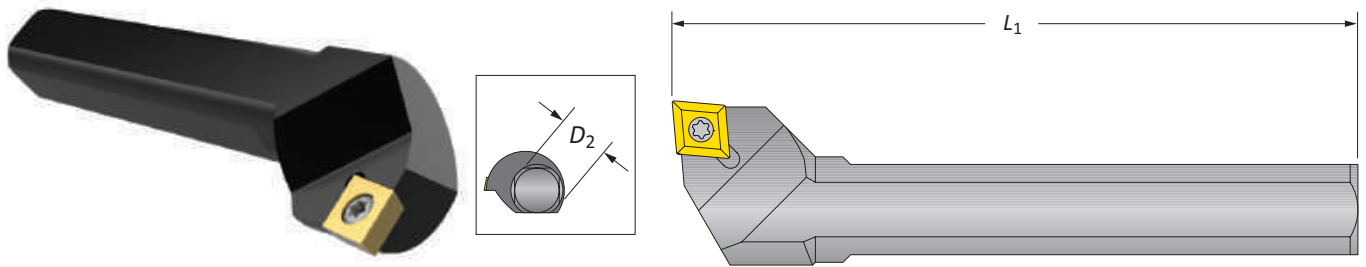

Cross Hole Boring Bar


		Boring Bar*				
Min. Bore Diameter		L_1	D_2	Weight	Insert Form	Part No.
i	4.937	4.750	0.750	0.550 (lbs)	CC..325..	0750DCH

*NOTICE: Cross hole bars should always be secured in the bar holder with at least two set screws

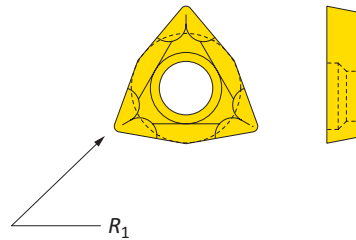



Coated Trigon Insert

	Insert		Part No.
	Insert Form	R_1	
i	WBGX0301...	0.004	WBGX030101

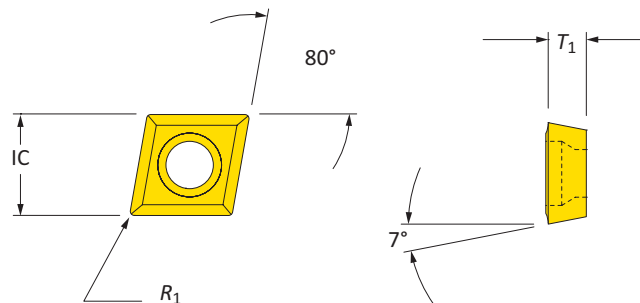

Coated 80° Diamond Inserts

		Insert			
Insert Form		IC	T_1	R_1	Part No.
i	CC..215..	0.250	0.094	0.008	CCMT060202
	CC..215..	0.250	0.094	0.016	CCMT060204
	CC..215.	0.250	0.094	0.031	CCMT060208
	CC..325...	0.375	0.156	0.008	CCMT09T302
	CC..325..	0.375	0.156	0.016	CCMT09T304
	CC..325..	0.375	0.156	0.031	CCMT09T308




i = Imperial (in)
m = Metric (mm)

Inserts sold separately

CB204E Versatile Boring Head

Bore Diameter Range: 0.500" - 13.437"

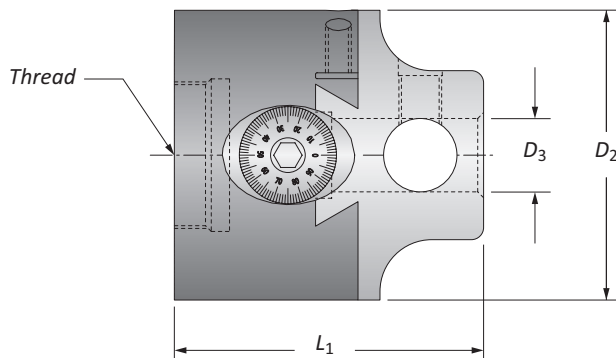


	Boring Range	Connection	Boring Head			Weight	Part No.
			L_1	D_2	D_3		
i	0.500 - 13.437	1½ - 18	3.715	4.000	1.000	9.300 (lbs)	CB204E

IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.

NOTICE: Cross hole bars should always be secured in the bar holder with at least two set screws

Imperial (in) = 0.001" adjustment on diameter

NOTE: Max spindle speed: 800 RPM at 0 radial offset

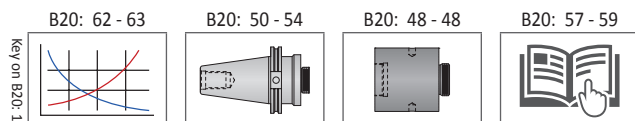

i = Imperial (in)
m = Metric (mm)

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com

WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:


- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department.



Boring Bars


Bore Diameter Range: 0.500" - 5.750"

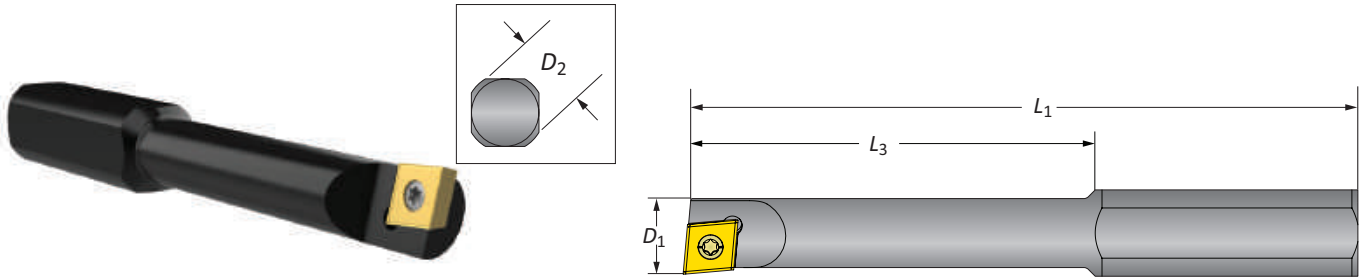

Steel Boring Bars | Bore Diameter Range: 0.500" - 5.750"

Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
D_1	L_3	L_1	D_2			
0.500	2.500	4.250	0.750*	0.280 (lbs)	CC..215..	0500D
0.750	3.000	4.687	0.750*	0.430 (lbs)	CC..325..	0750D
1.000	3.500	5.125	0.750*	0.510 (lbs)	CC..325..	1000D
1.250	4.000	5.562	0.750*	0.570 (lbs)	CC..325..	1250D


*Reducing sleeve required

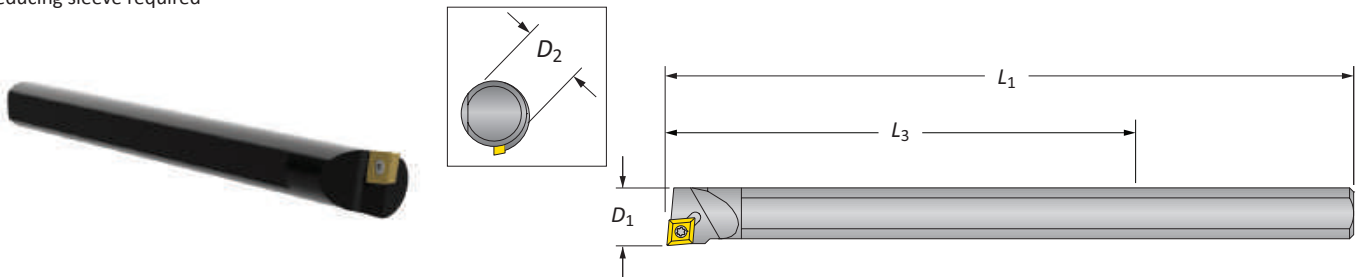

Heavy Metal Boring Bar | Bore Diameter Range: 0.832" - 5.125"


Min. Boring Diameter	Boring Bar			Weight	Insert Form	Part No.
D_1	L_3	L_1	D_2			
0.832	4.750	10.000	0.750*	1.150 (lbs)	CC..325..	0832DHM

*Reducing sleeve required

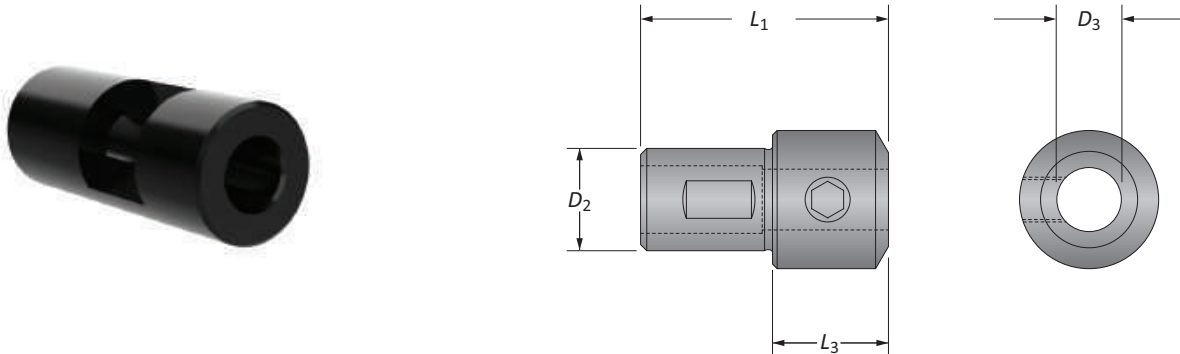

Reducing Sleeve

Reducing Sleeve				Weight	Part No.
D_3	D_2	L_1	L_3		
0.750	1.000	2.405	1.125	0.400 (lbs)	BTH-07501000





① = Imperial (in)
Ⓜ = Metric (mm)

Inserts sold separately



Boring Bars



Bore Diameter Range: 0.875" - 5.125"

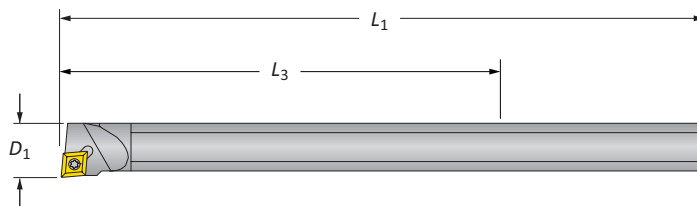

Carbide Boring Bar

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.875	6.000	10.000	0.750*	1.130 (lbs)	CC..325..	0875DCS


*Reducing sleeve required

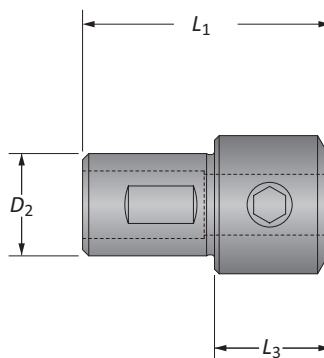

Reducing Sleeve

Reducing Sleeve					Weight	Part No.
D_3	D_2	L_1	L_3			
i	0.750	1.000	2.405	1.125	0.400 (lbs)	BTH-07501000

B20: 62 - 63



B20: 57 - 59




i = Imperial (in)
m = Metric (mm)

Inserts sold separately



Cross Hole Boring Bar | Boring Inserts


Bore Diameter Range: 5.625" - 13.437"

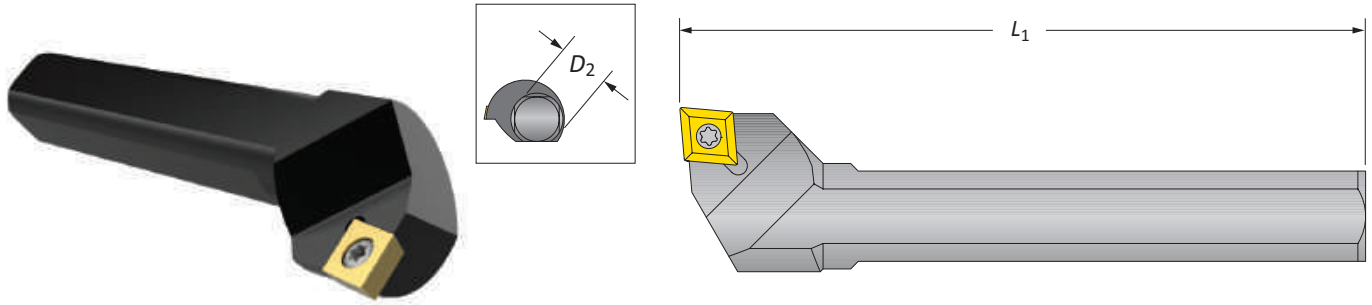

Cross Hole Boring Bar



		Boring Bar*				
		Min Boring Diameter	L_1			
	5.625	5.310	1.000	1.020 (lbs)	CC..325..	1000ECH

*NOTICE: Cross hole bars should always be secured in the bar holder with at least two set screws

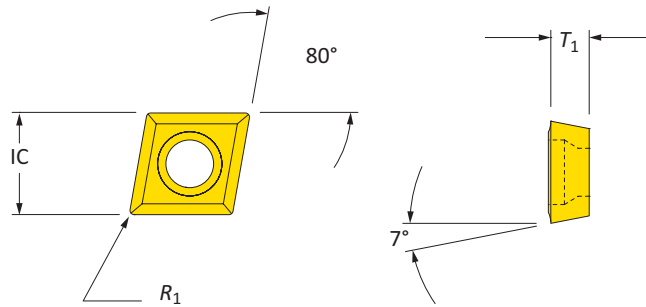

Coated 80° Diamond Inserts


	Insert Form	Insert			Part No.
		IC	T_1	R_1	
i	CC..215..	0.250	0.094	0.008	CCMT060202
	CC..215..	0.250	0.094	0.016	CCMT060204
	CC..215..	0.250	0.094	0.031	CCMT060208
	CC..325..	0.375	0.156	0.008	CCMT09T302
	CC..325..	0.375	0.156	0.016	CCMT09T304
	CC..325..	0.375	0.156	0.031	CCMT09T308



i = Imperial (in)
m = Metric (mm)
 Inserts sold separately

CB206F Versatile Boring Head

Bore Diameter Range: 0.500" - 21.500"

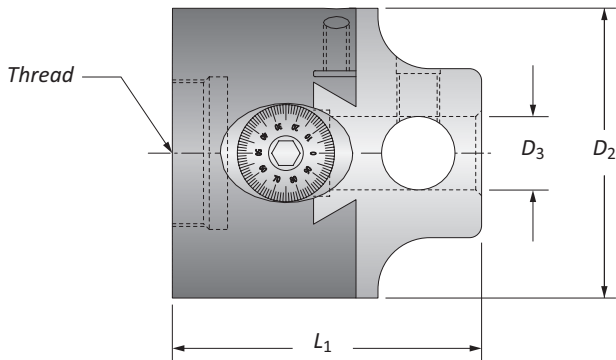


		Boring Head			Weight	Part No.
Boring Range	Connection	L ₁	D ₂	D ₃		
i 0.500 - 21.500	2 ¼ - 10	5.475	6.000	1.500	26.400 (lbs)	CB206F


IMPORTANT: Wax covered gib screws are factory set and should not be removed. Adjustment of these screws will cause performance issues.


NOTICE: Cross hole bars should always be secured in the bar holder with at least two set screws

Imperial (in) = 0.001" adjustment on diameter

NOTE: Max spindle speed: 500 RPM at 0 radial offset

B20: 62 - 63


B20: 50 - 54


B20: 48 - 49


B20: 57 - 59


Key on B20: 1

i = Imperial (in)
m = Metric (mm)

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
 ext: 7611 | email: appeng@alliedmachine.com

⚠ WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:


- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department.



Boring Bars


Bore Diameter Range: 0.500" - 9.125"

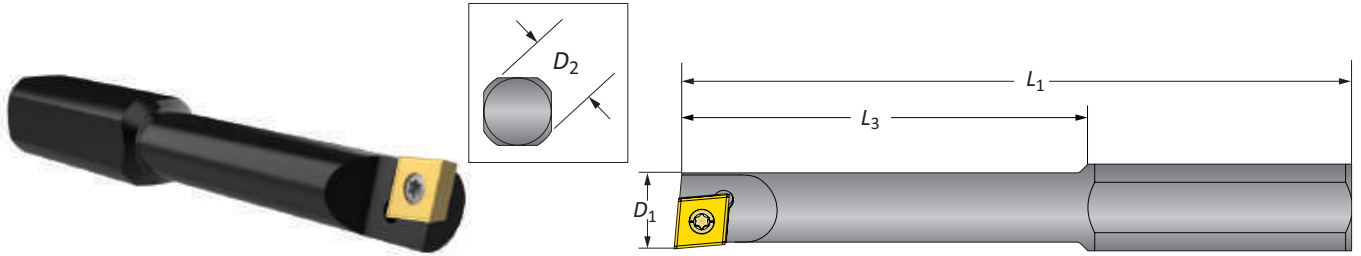

Steel Boring Bars | Bore Diameter Range: 0.500" - 9.125"

Min. Boring Diameter	Boring Bar					
D_1	L_3	L_1	D_2	Weight	Insert Form	Part No.
0.500	2.500	4.250	0.750*	0.280 (lbs)	CC..215..	0500D
0.750	3.000	4.687	0.750*	0.430 (lbs)	CC..325..	0750D
1.000	3.500	5.125	0.750*	0.510 (lbs)	CC..325..	1000D
1.250	4.000	5.562	0.750*	0.570 (lbs)	CC..325..	1250D


*Reducing sleeve required

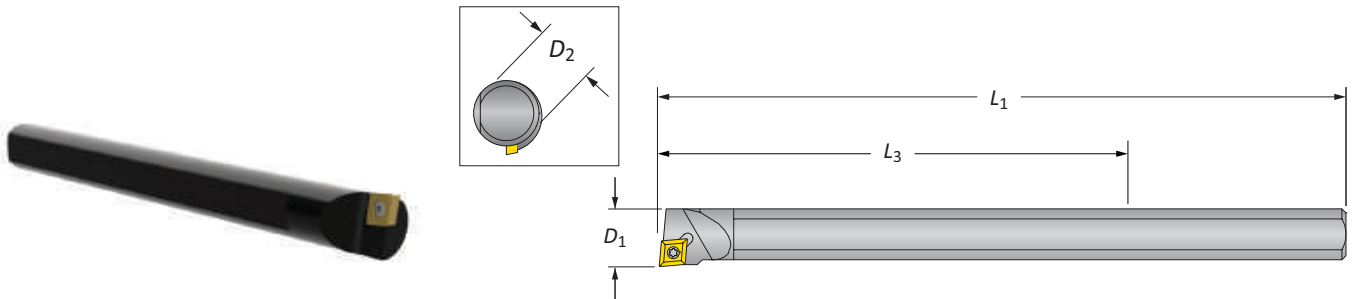

Heavy Metal Boring Bar | Bore Diameter Range: 0.832" - 7.125"


Min. Boring Diameter	Boring Bar					
D_1	L_3	L_1	D_2	Weight	Insert Form	Part No.
0.832	4.750	10.000	0.750*	1.150 (lbs)	CC..325..	0832DHM

*Reducing sleeve required

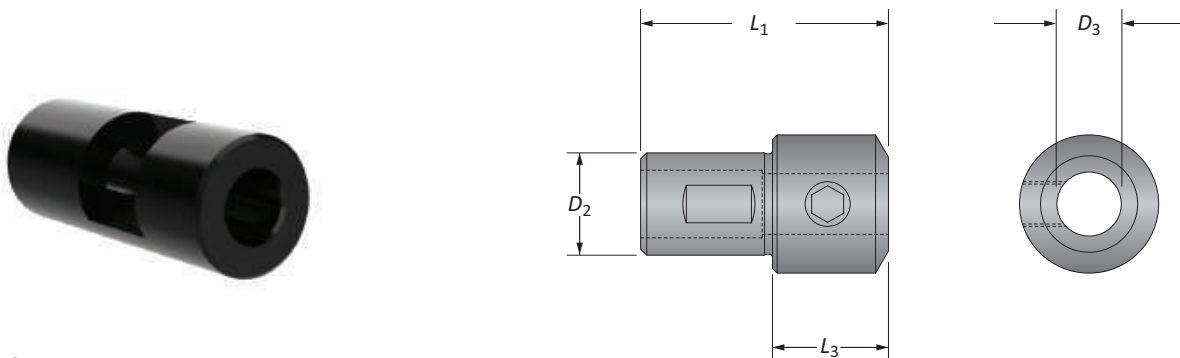

Reducing Sleeve

Reducing Sleeve					
D_3	D_2	L_1	L_3	Weight	Part No.
0.750	1.500	3.000	1.000	1.400 (lbs)	BTH-07501500





① = Imperial (in)
Ⓜ = Metric (mm)

Inserts sold separately



Carbide Boring Bar




Bore Diameter Range: 0.875" - 7.125"

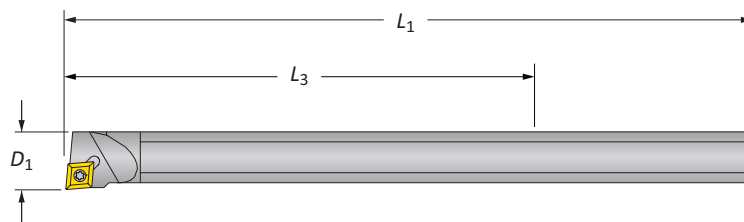

Carbide Boring Bar

Min. Boring Diameter	Boring Bar				Weight	Insert Form	Part No.
	D_1	L_3	L_1	D_2			
i	0.875	6.000	10.000	0.750*	1.130 (lbs)	CC..325..	0875DCS


*Reducing sleeve required

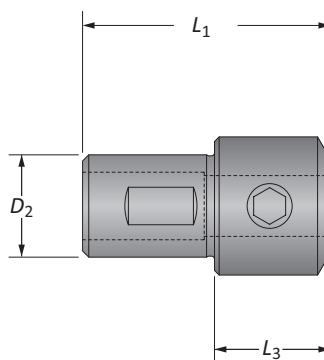

Reducing Sleeve

Reducing Sleeve					Weight	Part No.
D_3	D_2	L_1	L_3			
i	0.750	1.500	3.000	1.000	1.400 (lbs)	BTH-07501500

B20: 62 - 63



B20: 57 - 59




i = Imperial (in)
m = Metric (mm)

Inserts sold separately

Cross Hole Boring Bar | Boring Inserts


Bore Diameter Range: 9.093" - 21.500"

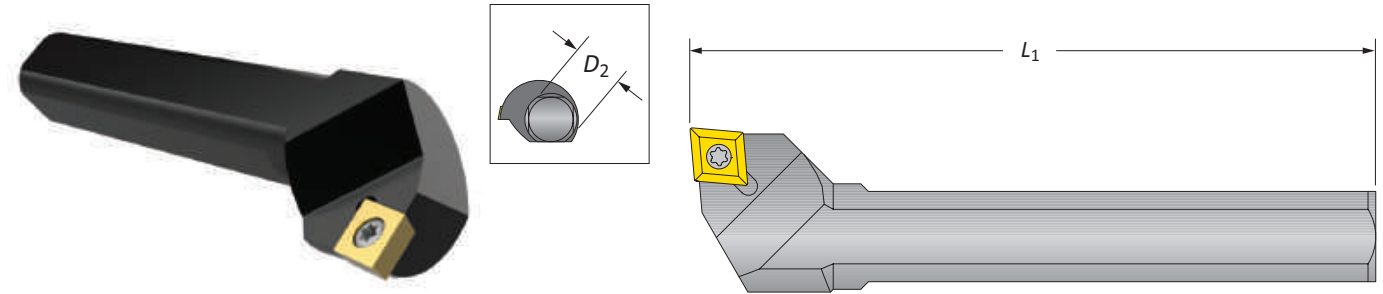

Cross Hole Boring Bar



	Boring Bar*		Weight	Insert Form	Part No.
	Min. Boring Diameter				
i	9.093	L_1 9.125 D_2 1.500	4.130 (lbs)	CC..43..	1500FCH

*NOTICE: Cross hole bars should always be secured in the bar holder with at least two set screws

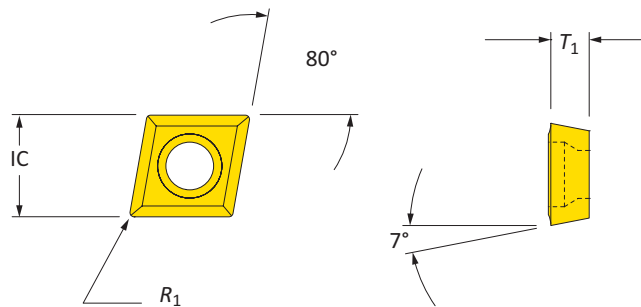

Coated 80° Diamond Inserts


	Insert Form	Insert			Part No.
		IC	T_1	R_1	
i	CC..215..	0.250	0.094	0.008	CCMT060202
	CC..215..	0.250	0.091	0.016	CCMT060204
	CC..215..	0.250	0.094	0.031	CCMT060208
	CC..325..	0.375	0.156	0.008	CCMT09T302
	CC..325..	0.375	0.156	0.016	CCMT09T304
	CC..325..	0.375	0.156	0.031	CCMT09T308
	CC..43..	0.500	0.188	0.031	CCMT120408




i = Imperial (in)
m = Metric (mm)
Inserts sold separately

Intermediate Modules

Reducers

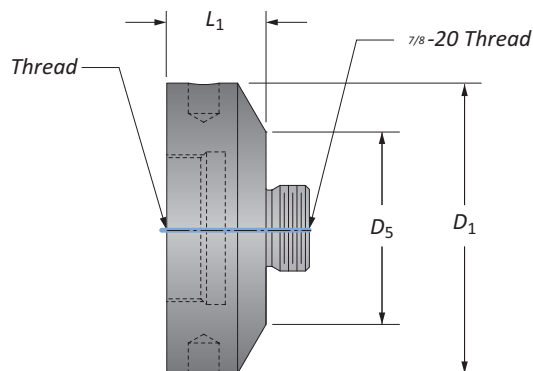

Reducer						
D_1	D_5	L_1	Weight	Thread	Part No.	
i	1.500	1.000	1.000	0.440 (lbs)	$\frac{7}{8}$ - 20	CB1500-IRCB1000
	1.500	1.250	1.000	0.450 (lbs)	$\frac{7}{8}$ - 20	CB1500-IRCB1250
	2.000	1.000	1.000	0.720 (lbs)	$\frac{7}{8}$ - 20	CB2000-IRCB1000
	2.000	1.250	1.000	0.760 (lbs)	$\frac{7}{8}$ - 20	CB2000-IRCB1250
	2.000	1.500	1.000	0.800 (lbs)	$\frac{7}{8}$ - 20	CB2000-IRCB1500
	3.000	1.000	1.250	1.610 (lbs)	1½ - 18	CB3000-IRCB1000
	3.000	1.250	1.250	1.750 (lbs)	1½ - 18	CB3000-IRCB1250
	3.000	1.500	1.250	1.840 (lbs)	1½ - 18	CB3000-IRCB1500
	3.000	2.000	1.250	2.020 (lbs)	1½ - 18	CB3000-IRCB2000

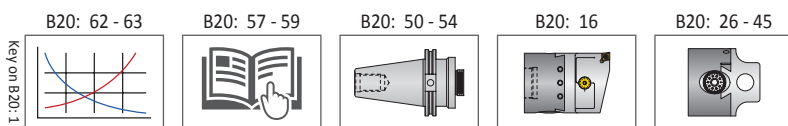

i = Imperial (in)
 m = Metric (mm)

WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

WARNING Tool failure can cause serious injury. To prevent:


- Do not exceed recommended 9xD length to diameter ratio or exceed 4 total components (including shank)
- Refer to example on page B20: 60 for calculating length to diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department.








Intermediate Modules

Extensions

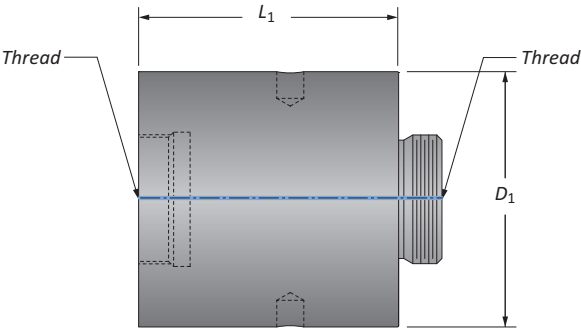

Extension				
D_1	L_1	Weight	Thread	Part No.
1.000	1.000	0.190 (lbs)	$\frac{1}{2}$ - 20	CB1000-IA1000
1.000	2.000	0.390 (lbs)	$\frac{1}{2}$ - 20	CB1000-IA2000
1.250	1.250	0.390 (lbs)	$\frac{1}{2}$ - 20	CB1250-IA1250
1.250	2.500	0.800 (lbs)	$\frac{1}{2}$ - 20	CB1250-IA2500
1.500	1.500	0.700 (lbs)	$\frac{1}{2}$ - 20	CB1500-IA1500
1.500	3.000	1.410 (lbs)	$\frac{1}{2}$ - 20	CB1500-IA3000
2.000	2.000	1.660 (lbs)	$\frac{1}{2}$ - 20	CB2000-IA2000
2.000	4.000	3.350 (lbs)	$\frac{1}{2}$ - 20	CB2000-IA4000
3.000	3.000	5.730 (lbs)	1½ - 18	CB3000-IA3000
3.000	6.000	11.500 (lbs)	1½ - 18	CB3000-IA6000

i



i = Imperial (in)
m = Metric (mm)

⚠ WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Refer to page B20: 61 to see formula for calculating weight of tool assembly.
- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

⚠ WARNING Tool failure can cause serious injury. To prevent:


- Do not exceed recommended 9xD length to diameter ratio or exceed 4 total components (including shank)
- Refer to example on page B20: 60 for calculating length to diameter ratio

Factory technical assistance is available for your specific applications through our Application Engineering department.

A
DRILLING
B
BORING
C
REAMING
D
BURNISHING
E
THREADING
X
SPECIALS

Criterion Master Shanks


CAT 40/50 | BT Flange

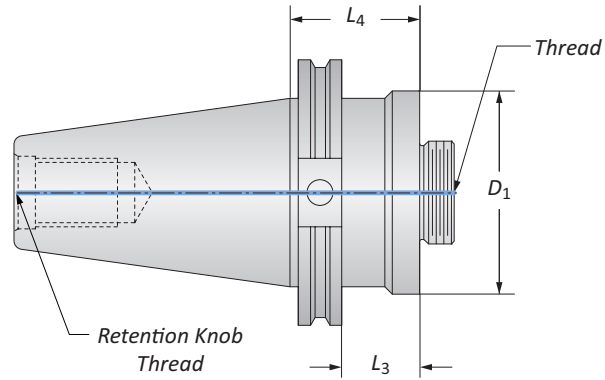

CAT 40/50 Shanks

Style	D_1	L_3	L_4	Shank			Retention Knob Thread	Part No.
				Weight	Thread			
CAT40	1.500	0.370	1.770	2.490 (lbs)	$\frac{3}{8}$ - 20		$\frac{3}{8}$ - 11	CB1500-CV40
CAT40	2.000	1.130	1.880	2.700 (lbs)	$\frac{3}{8}$ - 20		$\frac{3}{8}$ - 11	CB2000-CV40
CAT40	2.500	1.130	1.880	3.120 (lbs)	1½ - 18		$\frac{3}{8}$ - 11	CB2500-CV40
CAT40	3.000	1.180	1.880	3.410 (lbs)	1½ - 18		$\frac{3}{8}$ - 11	CB3000-CV40
i CAT50	1.500	0.370	1.770	7.120 (lbs)	$\frac{3}{8}$ - 20		1 - 8	CB1500-CV50
CAT50	2.000	1.130	1.880	7.330 (lbs)	$\frac{3}{8}$ - 20		1 - 8	CB2000-CV50
CAT50	2.500	1.130	1.880	7.740 (lbs)	1½ - 18		1 - 8	CB2500-CV50
CAT50	3.000	1.130	1.880	8.030 (lbs)	1½ - 18		1 - 8	CB3000-CV50
CAT50	3.380	1.380	2.130	9.440 (lbs)	2¼ - 10		1 - 8	CB6000-CV50






NOTE: Taper ground to AT3 tolerance

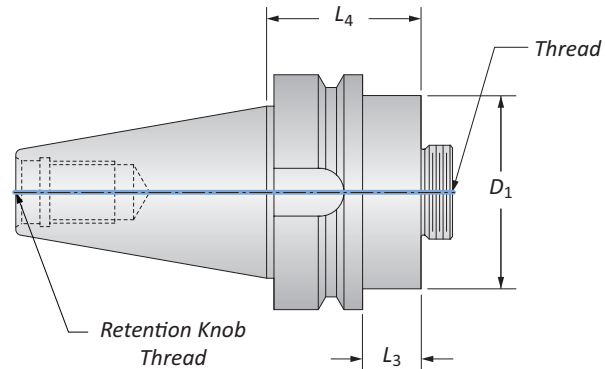

BT Flange Shanks

Style	D_1	L_3	L_4	Shank			Retention Knob Thread	Part No.
				Weight	Thread			
BT30	1.500	0.900	1.770	1.360 (lbs)	$\frac{3}{8}$ - 20		M12 x 1.75	CB1500-BT30
BT40	1.500	0.710	1.770	2.540 (lbs)	$\frac{3}{8}$ - 20		M16 x 2	CB1500-BT40
BT40	2.000	0.500	1.560	2.620 (lbs)	$\frac{3}{8}$ - 20		M16 x 2	CB2000-BT40
BT40	2.500	0.870	2.060	3.690 (lbs)	1½ - 18		M16 x 2	CB2500-BT40
i BT40	3.000	1.000	2.060	3.980 (lbs)	1½ - 18		M16 x 2	CB3000-BT40
BT50	1.500	0.270	1.770	8.220 (lbs)	$\frac{3}{8}$ - 20		M24 x 3	CB1500-BT50
BT50	2.000	0.060	1.560	8.250 (lbs)	$\frac{3}{8}$ - 20		M24 x 3	CB2000-BT50
BT50	3.000	0.500	2.060	9.410 (lbs)	1½ - 18		M24 x 3	CB3000-BT50
BT50	3.380	0.630	2.130	10.500 (lbs)	2¼ - 10		M24 x 3	CB6000-BT50


NOTE: Taper ground to AT3 tolerance



i = Imperial (in)
m = Metric (mm)


Criterion Master Shanks

HSK | Straight Shank

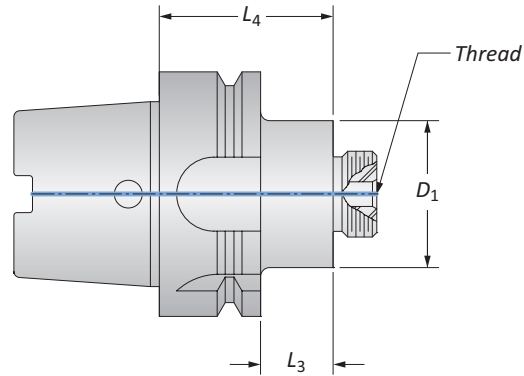






HSK Shanks

	Style	D_1	Shank			Weight	Thread	Part No.
			L_3	L_4				
i	HSK63	1.500	0.730	1.750		1.820 (lbs)	$\frac{7}{8}$ - 20	CB1500-HSK63A
	HSK63	2.000	0.730	1.750		2.090 (lbs)	$\frac{7}{8}$ - 20	CB2000-HSK63A
	HSK63	3.000	0.500	2.150		3.200 (lbs)	$1\frac{1}{2}$ - 18	CB3000-HSK63A
	HSK100	1.500	0.500	2.270		6.300 (lbs)	$\frac{7}{8}$ - 20	CB1500-HSK100A
	HSK100	2.000	0.500	2.270		6.470 (lbs)	$\frac{7}{8}$ - 20	CB2000-HSK100A
	HSK100	3.000	0.500	2.270		7.180 (lbs)	$1\frac{1}{2}$ - 18	CB3000-HSK100A

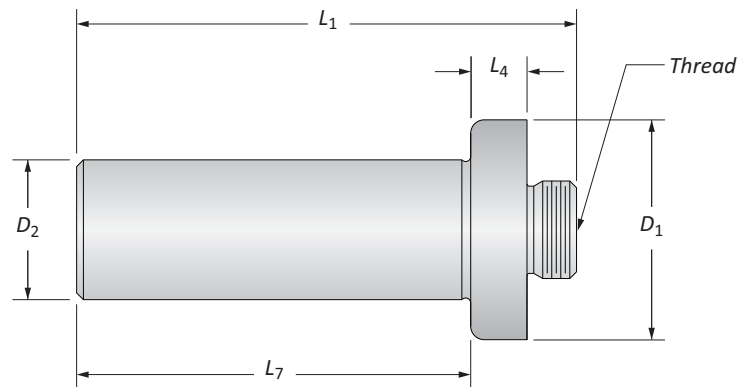

Straight Shanks

	Shank					Weight	Thread	Part No.
	D_1	D_2	L_4	L_7	L_1			
i	1.110	0.500	0.250	2.000	2.690	0.240 (lbs)	$\frac{7}{8}$ - 20	SS0500-087520
	1.110	0.625	0.250	2.370	3.060	0.340 (lbs)	$\frac{7}{8}$ - 20	SS0625-087520
	1.110	0.750	0.250	2.750	3.440	0.480 (lbs)	$\frac{7}{8}$ - 20	SS0750-087520
	1.110	1.000	0.250	3.120	3.810	0.820 (lbs)	$\frac{7}{8}$ - 20	SS1000-087520
	1.860	0.750	0.250	3.120	3.870	0.810 (lbs)	$1\frac{1}{2}$ - 18	SS0750-150018
	1.860	1.000	0.250	3.120	3.870	1.110 (lbs)	$1\frac{1}{2}$ - 18	SS1000-150018
	1.860	1.250	0.250	3.880	4.630	1.760 (lbs)	$1\frac{1}{2}$ - 18	SS1250-150018
	1.860	1.500	0.250	4.630	5.380	2.720 (lbs)	$1\frac{1}{2}$ - 18	SS1500-150018
	2.000	2.000	—	6.380	6.880	5.850 (lbs)	$1\frac{1}{2}$ - 18	SS2000-150018




i = Imperial (in)
m = Metric (mm)




Criterion Shanks

R-8 | Morse Taper

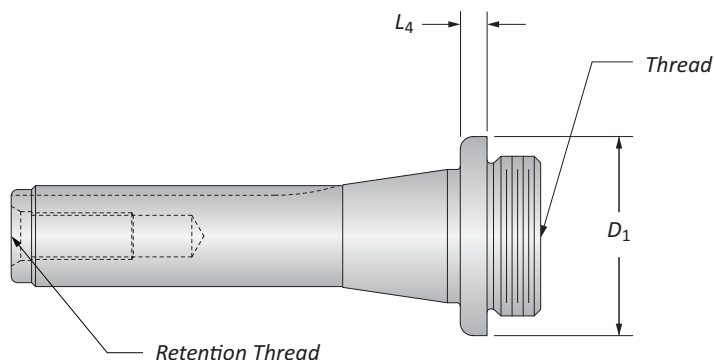

R-8 Shanks

	D_1	L_4	Shank			Part No.
			Weight	Thread	Retention Thread	
i	1.110	0.470	0.990 (lbs)	$\frac{7}{8}$ - 20	$\frac{7}{16}$ - 20	R8-087520
	1.860	0.370	1.270 (lbs)	1- $\frac{1}{2}$ - 18	$\frac{7}{16}$ - 20	R8-150018

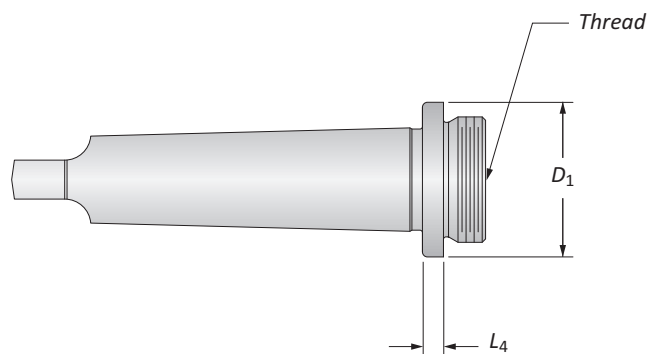

Morse Taper Shanks

	Style	D_1	L_4	Shank		Part No.
				Weight	Thread	
i	2 Taper	1.110	0.250	0.380 (lbs)	$\frac{7}{8}$ - 20	MT2-375THD87520*
	2 Taper	1.110	0.250	0.390 (lbs)	$\frac{7}{8}$ - 20	MT2-087520
	3 Taper	1.110	0.250	0.710 (lbs)	$\frac{7}{8}$ - 20	MT3-087520
	3 Taper	1.860	0.250	1.000 (lbs)	1- $\frac{1}{2}$ - 18	MT3-150018
	4 Taper	1.230	0.250	1.350 (lbs)	$\frac{7}{8}$ - 20	MT4-087520
	4 Taper	1.860	0.250	1.700 (lbs)	1- $\frac{1}{2}$ - 18	MT4-150018
	5 Taper	1.860	0.250	3.770 (lbs)	1- $\frac{1}{2}$ - 18	MT5-150018

*Item features a $\frac{3}{8}$ - 16 thread instead of tang





B20: 62 - 63

B20: 57 - 59

B20: 48 - 49

B20: 16


B20: 26 - 45



i = Imperial (in)
m = Metric (mm)


Criterion Master Shanks

NMTB Taper | DIN69871A

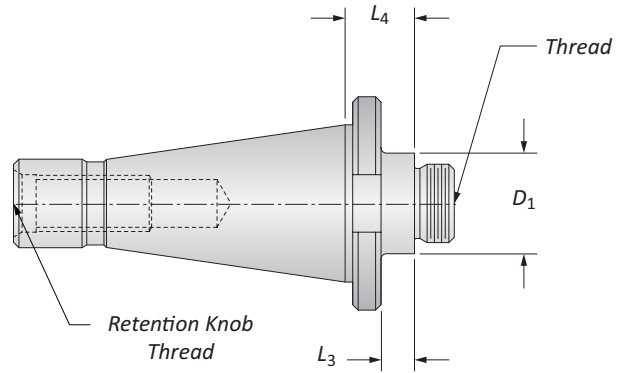

NMTB Taper Shanks


	Style	D_1	L_3	L_4	Shank			Part No.
					Weight	Thread	Retention Thread	
i	NMTB 30	1.120	0.370	0.790	0.810 (lbs)	$\frac{7}{8}$ - 20	$\frac{1}{2}$ - 13	NMTB30-087520
	NMTB 30	1.850	0.630	1.050	1.190 (lbs)	$1\frac{1}{2}$ - 18	$\frac{1}{2}$ - 13	NMTB30-150018
	NMTB 40	1.120	0.370	0.770	1.780 (lbs)	$\frac{7}{8}$ - 20	$\frac{5}{8}$ - 11	NMTB40-087520
	NMTB 40	1.850	0.630	1.020	2.310 (lbs)	$1\frac{1}{2}$ - 18	$\frac{5}{8}$ - 11	NMTB40-150018
	NMTB 50	1.970	0.510	1.250	6.750 (lbs)	$\frac{7}{8}$ - 20	1 - 8	NMTB50-087520
	NMTB 50	1.870	0.400	1.210	6.870 (lbs)	$1\frac{1}{2}$ - 18	1 - 8	NMTB50-150018
	NMTB 50	3.380	0.500	1.250	8.320 (lbs)	$2\frac{1}{4}$ - 10	1 - 8	NMTB50-225010

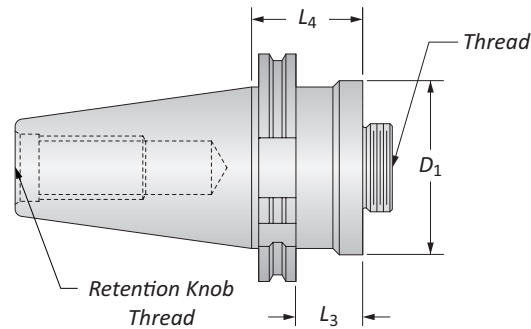

DIN 69871A

	D_1	L_3	L_4	Shank			Part No.
				Weight	Thread	Retention Thread	
m	38.00	19.00	38.40	1.18 (kg)	$\frac{7}{8}$ - 20	M16 x 2.0	CB038M-DIN40
	50.00	22.00	41.50	1.18 (kg)	$\frac{7}{8}$ - 20	M16 x 2.0	CB050M-DIN40
	76.00	45.00	48.00	1.68 (kg)	$1\frac{1}{2}$ - 18	M16 x 2.0	CB076M-DIN40
	38.00	19.00	38.40	3.36 (kg)	$\frac{7}{8}$ - 20	M24 x 3.0	CB038M-DIN50
	50.00	22.00	41.50	3.45 (kg)	$\frac{7}{8}$ - 20	M24 x 3.0	CB050M-DIN50
	76.00	22.00	48.00	3.66 (kg)	$1\frac{1}{2}$ - 18	M24 x 3.0	CB076M-DIN50

NOTE: Taper ground to AT3 tolerance

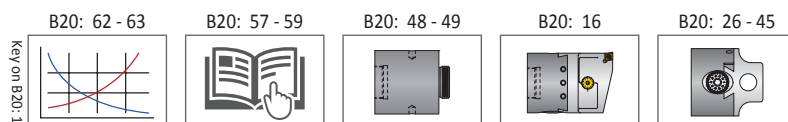


i = Imperial (in)
m = Metric (mm)



Criterion Shanks

DIN 2080

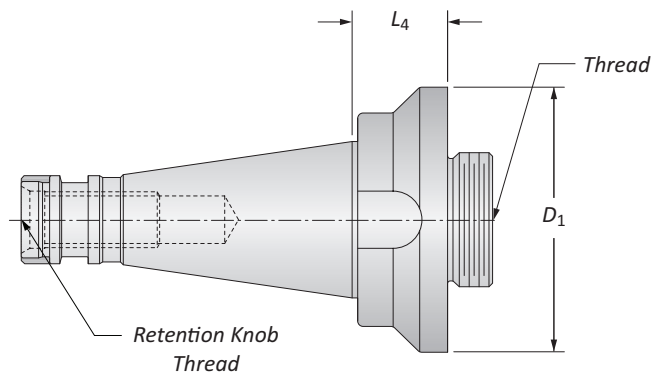

DIN 2080

		Shank					Part No.
	D_1	L_3	L_4	Weight	Thread	Retention Thread	
m	50.00	17.00	25.70	0.45 (kg)	$\frac{7}{8}$ - 20	M12	CB050M-ISO30
	50.00	11.00	27.70	0.91 (kg)	$\frac{7}{8}$ - 20	M16	CB050M-ISO40
	76.00	22.00	27.70	1.32 (kg)	1½ - 18	M16	CB076M-ISO40
	50.00	11.00	39.40	2.88 (kg)	$\frac{7}{8}$ - 20	M24	CB038M-ISO50
	76.00	36.00	39.40	3.36 (kg)	1½ - 18	M24	CB076M-ISO50

A

DRILLING

B

BORING

C

REAMING

D






BURNISHING

E

THREADING

X

SPECIALS




i = Imperial (in)
m = Metric (mm)

Criterion Accessories



Insert Screws | Drivers | Pin Spanner Wrenches

Insert Screws & Drivers

 Insert Form	 Part No.	 Thread	 Part No.	Technical Information	
				Torque Specs	Key Size
WBGX0301..	215377-1	M2x4	115537	0.6 (Nm)	T6
CC..215.. CC..0602..	115676-1	M2.5x5	115590	1.2 (Nm)	T8
CC..32500 CC..09T3 (<Ø37mm)	115672-1	M3.5x7.5	115664	3.0 (Nm)	T15
CC..32500 CC..09T3 (<Ø36mm)	115673-1	M3.5x9	115664	3.0 (Nm)	T15
CC..43.. CC..1204..	215149-1	M4.5x11.5	215150	5.0 (Nm)	T20
TC..215.. TC..1102..	115676-1	M2.5x5	115590	1.2 (Nm)	T8
TC..325.. TC..16T3	115673-1	M3.5x9	115664	3.0 (Nm)	T15

Pin Spanner Wrenches



 Body Diameter	Pin Spanner Wrench Part No.
1.000" (25.00mm)	CB1000-PSW
1.250" (32.00mm)	CB1250-PSW
1.500" (38.00mm)	CB1500-PSW
2.000" (38.00mm)	CB2000-PSW
2.500" (63.50mm)	CB2500-PSW
3.000" (76.00mm)	CB3000-PSW
4.000" (101.00mm)	CB4000-PSW





Criterion Hardware Kits

Corresponding Boring Head Item Number	Hardware Kit Part No.
CBR-0625CP, CBR-0628TP, CBR-0625SG, CBS-0625CP, CBS-0625TP, CBS-0625SG, CBER16S-SG, CBER16-SG, CBER20S-SG, CBER20-SG, CBER16MS-CP, CBER16M-CP, CBER16MS-TP, CBER16M-TP, CBER20MS-CP, CBER20M-CP, CBER20MS-TP, CBER20M-TP, CBER16S-CP, CBER16-CP, CBER16S-TP, CBER16-TP, CBER20S-CP, CBER20-CP, CBER20S-TP, CBER20-TP	CB0625-HDW
CBS-0750CP, CBS-0750TP, CBS-0750SH, CBR-0750CP, CBR-0750TP, CBR-0750SH, CBER25S-SH, CBER25-SH, CBER25S-CP, CBER25-CP, CBER25S-TP, CBER25-TP, CBER25-TP, CBER25MS-CP, CBER25M-CP, CBER25MS-TP	CB0750-HDW
TMT-0750H, TMT-1000H	TMT0750-HDW
CB1000CC, CB1000TC CBS-1000CP, CBS-1000TP, CBS-1000CPMA, CBS-1000TPMA, CBS-1000SA, CBR-1000CP, CBR-1000TP, CBR-1000CPMA, CBR-1000TPMA, CBR-1000SA, CBER32S-CPMA, CBER32-CPMA, CBER32S-TPMA, CBER32-TPMA, CBER32MS-CPMA, CBER32M-CPMA, CBER32MS-TPMA, CBER32M-TPMA, CBER32S-SA, CBER32-SA, CBER32S-CP, CBER32-CP, CBER32S-TP, CBER32-TP, CBER32MS-CP, CBER32M-CP, CBER32MS-TP, CBER32M-TP, CB1000-TPMA, CB1000-CPMA, CB1000-TP, CB1000-CP	CB1000-HDW
CT1000-0, CT1000-1, CT1000-2	CT1000-HDW
CB025MCC, CB025MTC, CB025M-TPMA, CB025M-CPMA, CB025M-TP, CB025M-CP	CB025M-HDW
CT025M-0, CT025M-1, CT025M-2	CT025M-HDW
CBS1250B, CB1250CC, CB1250TC, CBS-1250CP, CBS-1250TP, CBS-1250CPMA, CBS-1250TPMA, CBS-1250SB, CBR-1250CP, CBR-1250TP, CBR-1250CPMA, CBR-1250TPMA, CBR-1250SB, CBER40S-CPMA, CBER40-CPMA, CBER40S-TPMA, CBER40-TPMA, CBER40S-CPMA, CBER40M-CPMA, CBER40MS-TPMA, CBER40M-TPMA, CBER40S-SB, CBER40-SB, CBER40S-CP, CBER40-CP, CBER40S-TP, CBER40-TP, CBER40MS-CP, CBER40M-CP, CBER40MS-TP, CBER40M-TP, CB1250-TPMA, CB1250-CPMA, CB1250-TP, CB1250-CP	CB1250-HDW
CT1250-0, CT1250-1, CT1250-2	CT1250-HDW
CB032MCC, CB032MTC, CB032M-TPMA, CB032M-CPMA, CB032M-TP, CBO32M-CP	CB032M-HDW
CT032M-0, CT032M-1, CT032M-2	CT032M-HDW
MBS0500B, CB1500CC, CB1500TC, MB002-500, MB002-625, MB002-750, MB152-500, MB152-625, MB152-750, CB-2375A, CB-1500B, CB-1500AMA, CB1500-TPMA, CB1500-CPMA, CB1500-TP, CB1500-CP	CB1500-HDW
CT1500-0, CT1500-1, CT1500-2	CT1500-HDW
SQ-1500B	S1500-HDW
CB038MCC, CB038MTC, CB-038MA, CB-038MB, CB038M-TPMA, CB038M-CPMA, CB038M-TP, CB038M-CP	CB038-HDW
CT038M-0, CT038M-1, CT038-2	CT038M-HDW
SQ-2000B	S2000-HDW
CB2000CC, CB2000TC, CB202B, CB2500BMA	CB2000-HDW
CSL-202, CB-202A, CB-202B, CB-2500BMA, CB2000-TPMA, CB2000-CPMA, CB050M-TP, CB050M-CP	CB2000-HDW
CT2000-0, CT2000-1, CT2000-2	CT2000-HDW
CB050MCC, CB050MTC, CB-050MA, CB-050MB, CB-064MBMA, CB050M-TPMA, CB050M-TPMA, CB050M-TPMA, CB050M-CPMA, CB050M-TP, CP050M-CP	CB050M-HDW
CT050M-0, CT050M-1, CT050M-2	CT050M-HDW
SQ-3000D, SQ-3000E	S3000-HDW
CB3000CC, CB3000TC, CB203D, CSL-203, CB-203D, CB-3000DMA, CB3000-TPMA, CB3000-CPMA, CB3000-TP, CB3000-CP	CB3000-HDW
CT3000-0, CT3000-1, CT3000-2	CT3000-HDW
CB076MCC, CB076MTC, CB-076MD, CB-076MDMA, CB076M-TPMA, CB076M-CPMA, CBO76M-TP, CB076M-CP	CB076M-HDW
CT076M-0, CT076M-1, CT076M-2	CT076M-HDW
CB204E, CSL-204, CB-204E, CB4000-TP, CB4000-TP, CB4000-TP, CB4000-CP	CB4000-HDW
CB-101ME, CB101M-TP, CB101-CP	CB101M-HDW
CB206F, CB-206F	CB6000-HDW





Technical Information

Assembly Item Number	Torque Specs					
	Lock Screw	Locking Screw Allen Key Size	Dial Adjust Allen Key Size	Micro Adjusting Dial Allen Key Size	Clamping Screw Allen Key Size	Insert Torx Screw Driver Size
MBS0500B	1.4 (Nm)	5/64	5/32	-	1/8	-
CBS1250B	0.7 (Nm)	1/16	5/32	-	1/8	-
MDS0625	1.4 (Nm)	9/64	7/64	-	-	T8
MDS0750	1.5 (Nm)	5/32	7/64	-	-	T15
MDS16M	1.4 (Nm)	2.5mm	2.5mm	-	-	T8
MDS20M	1.5 (Nm)	3.0mm	2.5mm	-	-	T15
CB1000CC	0.6 (Nm)	0.050	5/32	3/32	-	T8
CB1000TC	0.6 (Nm)	0.050	5/32	3/32	-	T8
CB1250CC	0.7 (Nm)	1/16	5/32	3/32	-	T8
CB1250TC	0.7 (Nm)	1/16	5/32	3/32	-	T8
CB1500CC	1.4 (Nm)	5/64	5/32	7/64	-	T15
CB1500TC	1.4 (Nm)	5/64	5/32	7/64	-	T15
CB2000CC	2.3 (Nm)	3/32	5/32	7/64	-	T15
CB2000TC	2.3 (Nm)	3/32	5/32	7/64	-	T15
CB3000CC	5.3 (Nm)	1/8	1/4	7/64	-	T15
CB3000TC	5.3 (Nm)	1/8	1/4	7/64	-	T15
CB025MCC	0.6 (Nm)	1.5mm	4.0mm	2.5mm	-	T8
CB025MTC	0.6 (Nm)	1.5mm	4.0mm	2.5mm	-	T8
CB032MCC	0.7 (Nm)	2.0mm	4.0mm	2.5mm	-	T8
CB032MTC	0.7 (Nm)	2.0mm	4.0mm	2.5mm	-	T8
CB038MCC	1.4 (Nm)	2.0mm	4.0mm	3.0mm	-	T15
CB038MTC	1.4 (Nm)	2.0mm	4.0mm	3.0mm	-	T15
CB050MCC	2.3 (Nm)	2.5mm	4.0mm	3.0mm	-	T15
CB050MTC	2.3 (Nm)	2.5mm	4.0mm	3.0mm	-	T15
CB076MCC	5.3 (Nm)	3.0mm	6.0mm	3.0mm	-	T15
CB076MTC	5.3 (Nm)	3.0mm	6.0mm	3.0mm	-	T15
CB2500BMA	2.3 (Nm)	3/32	1/4	7/64	7/32	-
CB202B	2.3 (Nm)	3/32	5/32	-	5/32	-
CB203D	5.3 (Nm)	1/8	1/4	-	7/32	-
CB204E	12.4 (Nm)	5/32	1/4	-	7/32	-
CB206F	12.4 (Nm)	5/32	5/16	-	1/4	-

A

DRILLING

B

BORING

C

REAMING

D

BURNISHING

E


THREADING

X

SPECIALS

B20: 62 - 63

B20: 56 - 57



Setup Instructions | Standard Adjusting Boring Heads

Adjusting Standard Adjusting Boring Heads (see figure B1)

1. Loosen locking screw (6).
2. Turn dial screw (3) to desired graduation.
3. Tighten locking screw (6) to proper torque spec (laser marked on tool).

IMPORTANT: Do not loosen the gib screws (5). It can cause poor performance.

NOTE: To machine smaller bore diameters, turn dial screw (3) counterclockwise one full rotation to remove any backlash. Once backlash is mitigated, turn dial screw (3) clockwise to desired graduation.

No.	Part
1	Bar holder
2	Boring head body
3	Dial screw
4	Bar holder set screws
5	Gib screws (DO NOT ADJUST)
6	Locking screw



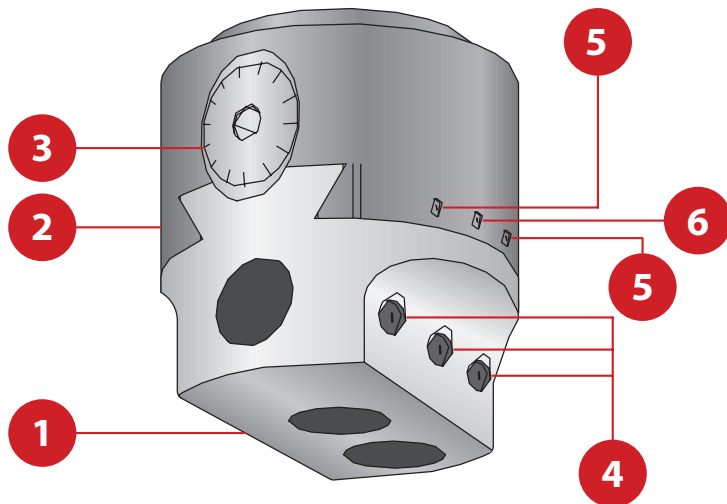


Figure B1



Setup Instructions | Micro Adjusting Boring Heads

Setting Up Micro Adjusting Boring Heads (see figure B2)

Set the micro adjusting dial screw range

- 1. The micro adjusting dial screws (4) only have a total range of 0.006" (0.152mm) on diameter. To zero, turn dial (4) clockwise until dial screw bottoms out. Turn the dial (4) two complete turns counterclockwise. Turn dial (4) one half turn clockwise. Dial is now centered for 0.003" (0.076mm) positive or negative travel.

Setting the diameter of the boring head

- 2. Loosen locking screw (6).
- 3. Turn dial screw (3) to adjust to the desired diameter using a pre-setter or plunge indicator, or the dial screw (3).
- 4. Tighten the locking screw (6) to the proper torque spec (laser marked on the tool).
 - Micro adjustments will be made at the machine.
- 5. Make a shallow test cut (roughly 0.250" deep) to determine the actual diameter.
- 6. Use the micro adjusting dial (4) to adjust to the finish diameter. Do not release the locking screw (6) for micro adjustments.
 - If the hole diameter is more than .002" from the target hole size return to step 2.

IMPORTANT: Do not loosen the gib screws (5). It can cause poor performance.

NOTE: Backlash occurs when the diameter of the boring head needs to be decreased. To remove backlash, turn the dial (3) counterclockwise at least one half of a full rotation past the desired adjustment. Once backlash is mitigated, turn dial screw (3) clockwise to the desired adjustment.

No.	Part
1	Insert holder
2	Boring head body
3	Dial screw
4	Micro adjusting dial screw
5	Gib screws (DO NOT ADJUST)
6	Locking screw


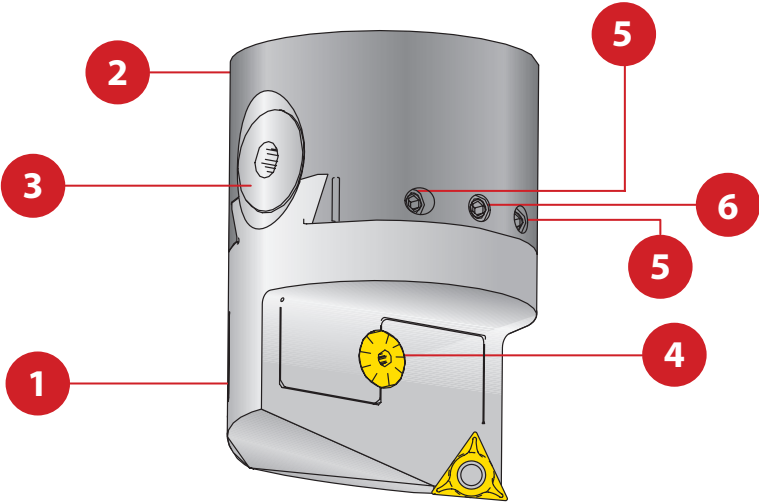


Figure B2

B20: 62 - 63




B20: 56 - 57



Guidelines for Not Exceeding Recommended Length to Diameter Ratio

To calculate, see graphics below:

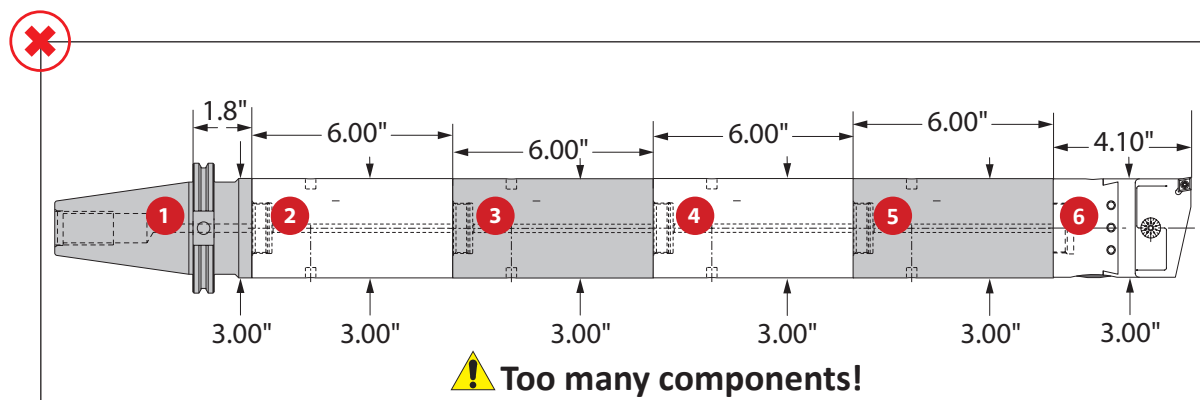

*Length to diameter ratio is calculated using body diameters, not cutting diameter.


Step 1: Find L : D by component

- 1 $0.6 = 1.88/3.00$
- 2 $2.0 = 6.00/3.00$
- 3 $2.0 = 6.00/3.00$
- 4 $2.0 = 6.00/3.00$
- 5 $2.0 = 6.00/3.00$
- 6 $1.4 = 4.10/3.00$

Step 2: Add each L : D Average

0.6	→	0.6
2.0	→	2.0
2.0	→	2.0
2.0	→	2.0
2.0	→	2.0
2.0	→	2.0
1.4	→	1.4
		+ 1.4
		10.0 = L : D ratio

! Too Long!

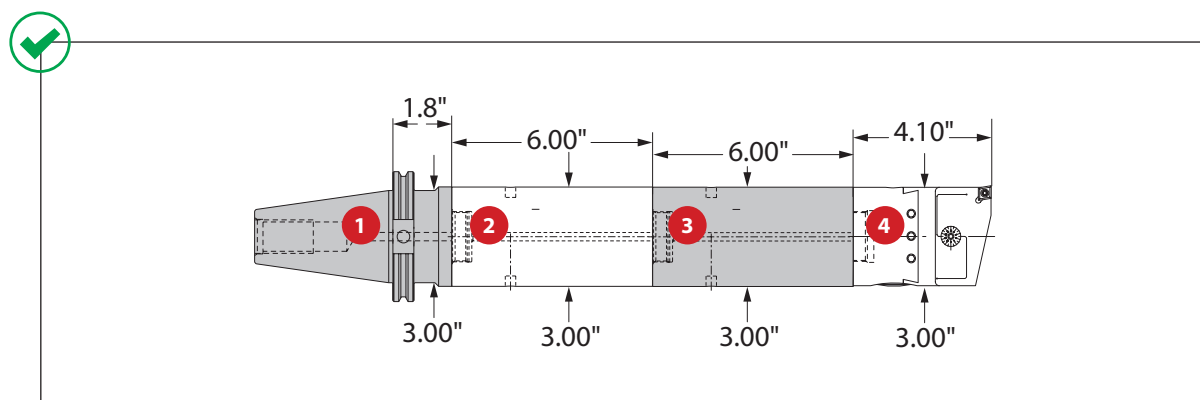

*Length to diameter ratio is calculated using body diameters, not cutting diameter.

Step 1: Find L : D by component

- 1 $0.6 = 1.88/3.00$
- 2 $2.0 = 6.00/3.00$
- 3 $2.0 = 6.00/3.00$
- 4 $1.4 = 4.10/3.00$

Step 2: Add each L : D Average

0.6	→	0.6
2.0	→	2.0
2.0	→	2.0
1.4	→	1.4
		+ 1.4
		6.0 = L : D ratio


⚠ WARNING Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 9xD length to diameter ratio or exceed 4 total components (including shank)

Factory technical assistance is available for your specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

Calculating Tool Assembly Weight

To calculate, see graphics below:

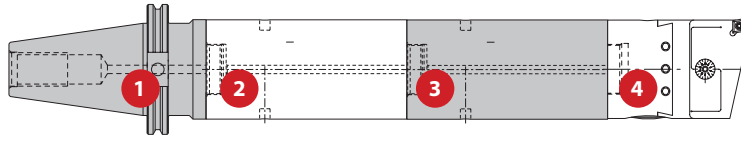

Step 1: Find weight for each component

Example:

Boring Range	Thread Connection	4 Boring Head		Weight	Insert Form	Order Number
		L_1	D_2			
D_1						
1.050 - 1.320	$\frac{1}{8}$ - 20	2.690	1.000	0.50 (lbs)	CC...215...	CB1000CC
1.050 - 1.320	$\frac{1}{8}$ - 20	2.690	1.000	0.50 (lbs)	TC...215...	CB1000TC
1.300 - 1.600	$\frac{1}{8}$ - 20	2.900	1.250	0.80 (lbs)	CC...215...	CB1250CC
1.300 - 1.600	$\frac{1}{8}$ - 20	2.900	1.250	0.80 (lbs)	TC...215...	CB1250TC
1.585 - 2.700	$\frac{1}{8}$ - 20	3.200	1.500	1.30 (lbs)	CC...325...	CB1500CC
1.585 - 2.700	$\frac{1}{8}$ - 20	3.200	1.500	1.30 (lbs)	TC...325...	CB1500TC
2.060 - 3.320	$\frac{1}{8}$ - 20	3.590	2.000	2.40 (lbs)	CC...325...	CB2000CC
2.060 - 3.320	$\frac{1}{8}$ - 20	3.590	2.000	2.40 (lbs)	TC...325...	CB2000TC
3.065 - 5.065	$1\frac{1}{2}$ - 18	4.100	3.000	5.80 (lbs)	CC...325...	CB3000CC
3.065 - 5.065	$1\frac{1}{2}$ - 18	4.100	3.000	5.80 (lbs)	TC...325...	CB3000TC
27.00 - 33.00	$\frac{1}{8}$ - 20	68.35	25	0.23 (kg)	CC...0602...	CB025MCC
27.00 - 33.00	$\frac{1}{8}$ - 20	68.35	25	0.23 (kg)	TC...1102...	CB025MTC
33.00 - 41.00	$\frac{1}{8}$ - 20	73.65	32	0.36 (kg)	CC...0602...	CB032MCC
33.00 - 41.00	$\frac{1}{8}$ - 20	73.65	32	0.36 (kg)	TC...1102...	CB032MTC
41.00 - 68.00	$\frac{1}{8}$ - 20	81.25	38	0.59 (kg)	CC...09T3...	CB038MCC
41.00 - 68.00	$\frac{1}{8}$ - 20	81.25	38	0.59 (kg)	TC...16T3...	CB038MTC
53.00 - 84.00	$\frac{1}{8}$ - 20	91.30	50	1.09 (kg)	CC...09T3...	CB050MCC
53.00 - 84.00	$\frac{1}{8}$ - 20	91.30	50	1.09 (kg)	TC...16T3...	CB050MTC
78.00 - 128.00	$1\frac{1}{2}$ - 18	104.25	76	2.36 (kg)	CC...09T3...	CB076MCC
78.00 - 128.00	$1\frac{1}{2}$ - 18	104.25	76	2.36 (kg)	TC...16T3...	CB076MTC

Imperial (in) = 0.00005" adjustment on diameter

Metric (mm) = 0.001mm adjustment on diameter

Step 2: Calculate total assembly weight

$$\begin{array}{r}
 1 \quad 8.03 \text{ lbs} \\
 2 \quad 11.50 \text{ lbs} \\
 3 \quad 11.50 \text{ lbs} \\
 + 4 \quad 5.80 \text{ lbs} \\
 \hline
 36.83 \text{ lbs}
 \end{array}$$

Step 3: Consult machine tool builder to ensure tool assembly weight does not exceed machine capabilities.

WARNING

Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:

- Consult machine tool builder for machine's weight limitations.

Factory technical assistance is also available for specific applications through our Application Engineering department. ext: 7611 | email: appeng@alliedmachine.com

Recommended Cutting Data | Imperial (inch)

ISO	Material	(BHN) Hardness	Grade	*Speed SFM	Recommended Feed (inch / tooth) Nose Radius			
					0.004"	0.008"	0.016"	0.031"
P	Free Machining Steel 1118, 1215, 12L14, etc.	100 - 250	Carbide	525 - 975	0.001 - 0.003	0.002 - 0.005	0.004 - 0.006	0.006 - 0.009
	Low Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 275	Carbide	475 - 925	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Medium Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 325	Carbide	475 - 825	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Alloy Steel 4140, 5140, 8640, etc.	125 - 375	Carbide	400 - 700	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	High Strength Alloy 4340, 4330V, 300M, etc.	225 - 400	Carbide	325 - 600	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Structural Steel A36, A285, A516, etc.	100 - 350	Carbide	475 - 925	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 250	Carbide	325 - 600	0.001 - 0.002	0.002 - 0.003	0.003 - 0.004	0.004 - 0.006
S	High Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	Carbide	100 - 225	0.001 - 0.002	0.002 - 0.003	0.003 - 0.005	0.004 - 0.006
	Titanium Alloy	140 - 310	Carbide	125 - 300	0.001 - 0.002	0.002 - 0.003	0.003 - 0.005	0.004 - 0.006
	Aerospace Alloy S82	185 - 350	Carbide	125 - 300	0.001 - 0.002	0.002 - 0.003	0.003 - 0.005	0.004 - 0.006
M	Stainless Steel 400 Series 416, 420, etc.	185 - 350	Carbide	300 - 525	0.001 - 0.002	0.002 - 0.004	0.003 - 0.004	0.004 - 0.006
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	Carbide	300 - 525	0.001 - 0.002	0.002 - 0.004	0.003 - 0.004	0.004 - 0.006
	Super Duplex Stainless Steel	135 - 275	Carbide	300 - 525	0.001 - 0.002	0.002 - 0.004	0.003 - 0.004	0.004 - 0.006
H	Wear Plate	400 - 600	Carbide	100 - 200	0.001 - 0.002	0.002 - 0.003	0.003 - 0.004	0.004 - 0.006
	Hardened Steel	300 - 500	Carbide	125 - 275	0.001 - 0.002	0.002 - 0.003	0.003 - 0.004	0.004 - 0.006
K	SG / Nodular Cast Iron	120 - 320	Carbide	475 - 850	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Grey / White Iron	180 - 320	Carbide	600 - 1000	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
N	Cast Aluminum	30 - 180	Carbide	850 - 1000	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Wrought Aluminum	30 - 180	Carbide	675 - 1000	0.001 - 0.003	0.002 - 0.005	0.004 - 0.006	0.006 - 0.009
	Aluminum Bronze	100 - 250	Carbide	475 - 925	0.001 - 0.002	0.002 - 0.004	0.004 - 0.005	0.005 - 0.008
	Brass	100	Carbide	675 - 1000	0.001 - 0.002	0.002 - 0.004	0.003 - 0.005	0.005 - 0.008
	Copper	60	Carbide	325 - 600	0.001 - 0.002	0.002 - 0.003	0.003 - 0.004	0.004 - 0.005

*Not to exceed max recommended RPM for boring head

Deep Hole Boring Speed Adjustment

⚠ For Dynamic Boring Tool Length			
Boring Type	7xD	8xD	9xD
Finishing	0.70	0.50	0.30

Recommended Speed Example

If the recommended speed for a finish boring assembly under 5xD is 400 SFM, then the speed for an 8xD finish boring assembly in the same application would be 200 SFM. (400 SFM x 0.50 = 200 SFM)

5xD = 400 SFM

8xD = 200 SFM

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com

⚠ WARNING Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 9xD length to diameter ratio or exceed 4 total components (including shank)
 - Refer to example on page B20: 60 for calculating length to diameter ratio
- Factory technical assistance is available for your specific applications through our Application Engineering department.



Recommended Cutting Data | Metric (mm)

ISO	Material	(BHN) Hardness	Grade	*Speed M/min	Recommended Feed (mm / tooth) Nose Radius			
					0.1mm	0.2mm	0.4mm	0.8mm
P	Free Machining Steel 1118, 1215, 12L14, etc.	100 - 250	Carbide	160 - 300	0.02 - 0.07	0.05 - 0.13	0.10 - 0.15	0.15 - 0.23
	Low Carbon Steel 1010, 1020, 1025, 1522, 1144, etc.	85 - 275	Carbide	145 - 280	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Medium Carbon Steel 1030, 1040, 1050, 1527, 1140, 1151, etc.	125 - 325	Carbide	145 - 250	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Alloy Steel 4140, 5140, 8640, etc.	125 - 375	Carbide	120 - 210	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	High Strength Alloy 4340, 4330V, 300M, etc.	225 - 400	Carbide	100 - 180	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Structural Steel A36, A285, A516, etc.	100 - 350	Carbide	145 - 280	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Tool Steel H-13, H-21, A-4, O-2, S-3, etc.	150 - 250	Carbide	100 - 180	0.02 - 0.05	0.05 - 0.07	0.07 - 0.10	0.10 - 0.15
S	High Temp Alloy Hastelloy B, Inconel 600, etc.	140 - 310	Carbide	30 - 70	0.02 - 0.05	0.05 - 0.07	0.07 - 0.13	0.10 - 0.15
	Titanium Alloy	140 - 310	Carbide	40 - 90	0.02 - 0.05	0.05 - 0.07	0.07 - 0.13	0.10 - 0.15
	Aerospace Alloy S82	185 - 350	Carbide	40 - 90	0.02 - 0.05	0.05 - 0.07	0.07 - 0.13	0.10 - 0.15
M	Stainless Steel 400 Series 416, 420, etc.	185 - 350	Carbide	90 - 160	0.02 - 0.05	0.05 - 0.10	0.07 - 0.10	0.10 - 0.15
	Stainless Steel 300 Series 304, 316, 17-4PH, etc.	135 - 275	Carbide	90 - 160	0.02 - 0.05	0.05 - 0.10	0.07 - 0.10	0.10 - 0.15
	Super Duplex Stainless Steel	135 - 275	Carbide	90 - 160	0.02 - 0.05	0.05 - 0.10	0.07 - 0.10	0.10 - 0.15
H	Wear Plate	400 - 600	Carbide	30 - 60	0.02 - 0.05	0.05 - 0.07	0.07 - 0.10	0.10 - 0.15
	Hardened Steel	300 - 500	Carbide	40 - 80	0.02 - 0.05	0.05 - 0.07	0.07 - 0.10	0.10 - 0.15
K	SG / Nodular Cast Iron	120 - 320	Carbide	145 - 260	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Grey / White Iron	180 - 320	Carbide	180 - 306	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
N	Cast Aluminum	30 - 180	Carbide	260 - 306	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Wrought Aluminum	30 - 180	Carbide	205 - 305	0.02 - 0.07	0.05 - 0.13	0.10 - 0.15	0.15 - 0.23
	Aluminum Bronze	100 - 250	Carbide	145 - 280	0.02 - 0.05	0.05 - 0.10	0.10 - 0.13	0.13 - 0.20
	Brass	100	Carbide	205 - 305	0.02 - 0.05	0.05 - 0.10	0.07 - 0.13	0.13 - 0.20
	Copper	60	Carbide	100 - 180	0.02 - 0.05	0.05 - 0.07	0.07 - 0.10	0.10 - 0.13

*Not to exceed max recommended RPM for boring head

Deep Hole Boring Speed Adjustment

⚠ For Dynamic Boring Tool Length			
Boring Type	7xD	8xD	9xD
Finishing	0.70	0.50	0.30

Recommended Speed Example

If the recommended speed for a finish boring assembly under 5xD is 260 M/min, then the speed for an 8xD finish boring assembly in the same application would be 260 M/min. (260 M/min x 0.50 = 130 M/min)

5xD = 260 M/min

8xD = 130 M/min

IMPORTANT: Max spindle speed refers to maximum possible speed for individual boring head and is not a recommended parameter. Refer to page B20: 62 for recommended application specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department.
ext: 7611 | email: appeng@alliedmachine.com

⚠ WARNING Tool failure can cause serious injury. To prevent:

- Do not exceed recommended 9xD length to diameter ratio or exceed 4 total components (including shank)
 - Refer to example on page B20: 60 for calculating length to diameter ratio
- Factory technical assistance is available for your specific applications through our Application Engineering department.



Notes

A

DRILLING

B

BORING

C

REAIMING

D

BURNISHING

E

THREADING

X

SPECIALS



S.C.A.M.I.®

ROLLER BURNISHING

When your mirror finish still isn't shiny enough, follow your Criterion® boring tool with a S.C.A.M.I. roller burnisher. Contact your local Allied Machine & Engineering representative for more details.

S.C.A.M.I.®

 **ALLIED MACHINE
& ENGINEERING**

Guaranteed Test / Demo Application Form

Distributor PO #

The following must be filled out completely before your test will be considered

Distributor Information

Company Name: _____
Contact: _____
Account Number: _____
Phone: _____
Email: _____

End User Information

Company Name: _____
Contact: _____
Industry: _____
Phone: _____
Email: _____

Current Process List all tooling, coatings, substrates, speeds and feeds, tool life, and any problems you are experiencing

Test Objective List what would make this a successful test (i.e. penetration rate, finish, tool life, hole size, etc.)

Application Information

Finish Bore Diameter: _____ in/mm Tolerance: _____ Material: _____
(4150 / A36 / Cast Iron / etc.)
Pre-existing Diameter: _____ in/mm Depth of Bore: _____ in/mm Hardness: _____
(BHN / Rc)
State: _____
(Casting / Hot rolled / Forging)

Machine Information

Machine Type: _____ Builder: _____ Model #: _____
(Lathe / Screw machine / Machine center / etc.) (Haas, Mori Seiki, etc.)
Shank Required: _____ Power: _____ HP/KW
(CAT50 / Morse taper, etc.)
Rigidity: _____ Orientation: _____ Tool Rotating: _____ Using Canned Boring Cycle _____ Thrust: _____ lbs/N
☐ Excellent ☐ Vertical ☐ Yes ☐ Yes
☐ Good ☐ Horizontal ☐ No ☐ No
☐ Poor

Coolant Information

Coolant Delivery: _____ Coolant Pressure: _____ PSI / bar
(Through tool / Flood)
Coolant Type: _____ Coolant Volume: _____ GPM / LPM
(Air mist, oil, synthetic, water soluble, etc.)

Requested Tooling

QTY	Item Number

QTY	Item Number



Allied Machine & Engineering
120 Deeds Drive
Dover, OH 44622

Telephone: (330) 343-4283
Toll Free USA & Canada: (800) 321-5537
Fax: (330) 602-3400

Warranty Information



Allied Machine & Engineering ("Allied Machine") warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine's sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



Allied Machine & Engineering
Registered to ISO 9001
10001329

United States

Allied Machine & Engineering

120 Deeds Drive
Dover OH 44622
United States

Phone:
+1.330.343.4283

Fax:
+1.330.602.3400

Toll Free USA and Canada:
800.321.5537

Toll Free USA and Canada:
800.223.5140

Allied Machine & Engineering

485 W Third Street
Dover OH 44622
United States

Phone:
+1.330.343.4283

Fax:
+1.330.364.7666
(Engineering Dept.)

Toll Free USA and Canada:
800.321.5537

Europe

Allied Machine & Engineering Co. (Europe) Ltd.

93 Vantage Point
Pensnett Estate
Kingswinford
West Midlands
DY6 7FR England

Phone:
+44 (0) 1384.400900

Wohlhaupter GmbH

Maybachstrasse 4
Postfach 1264
72636 Frickenhausen
Germany

Phone:
+49 (0) 7022.408.0

Fax:
+49 (0) 7022.408.212

Asia

Wohlhaupter India Pvt. Ltd.

B-23, 3rd Floor
B Block Community Centre
Janakpuri, New Delhi - 110058
India

Phone:
+91 (0) 11.41827044

Your local Allied Machine representative:

www.alliedmachine.com

Allied Machine & Engineering is registered to ISO 9001:2015 by DQS



Copyright © 2021 Allied Machine & Engineering Corp. All rights reserved.
All trademarks designated with the ® symbol are registered in the United States and other countries.
Literature Order Number: AMPC-B2
Print Date: December 2019