


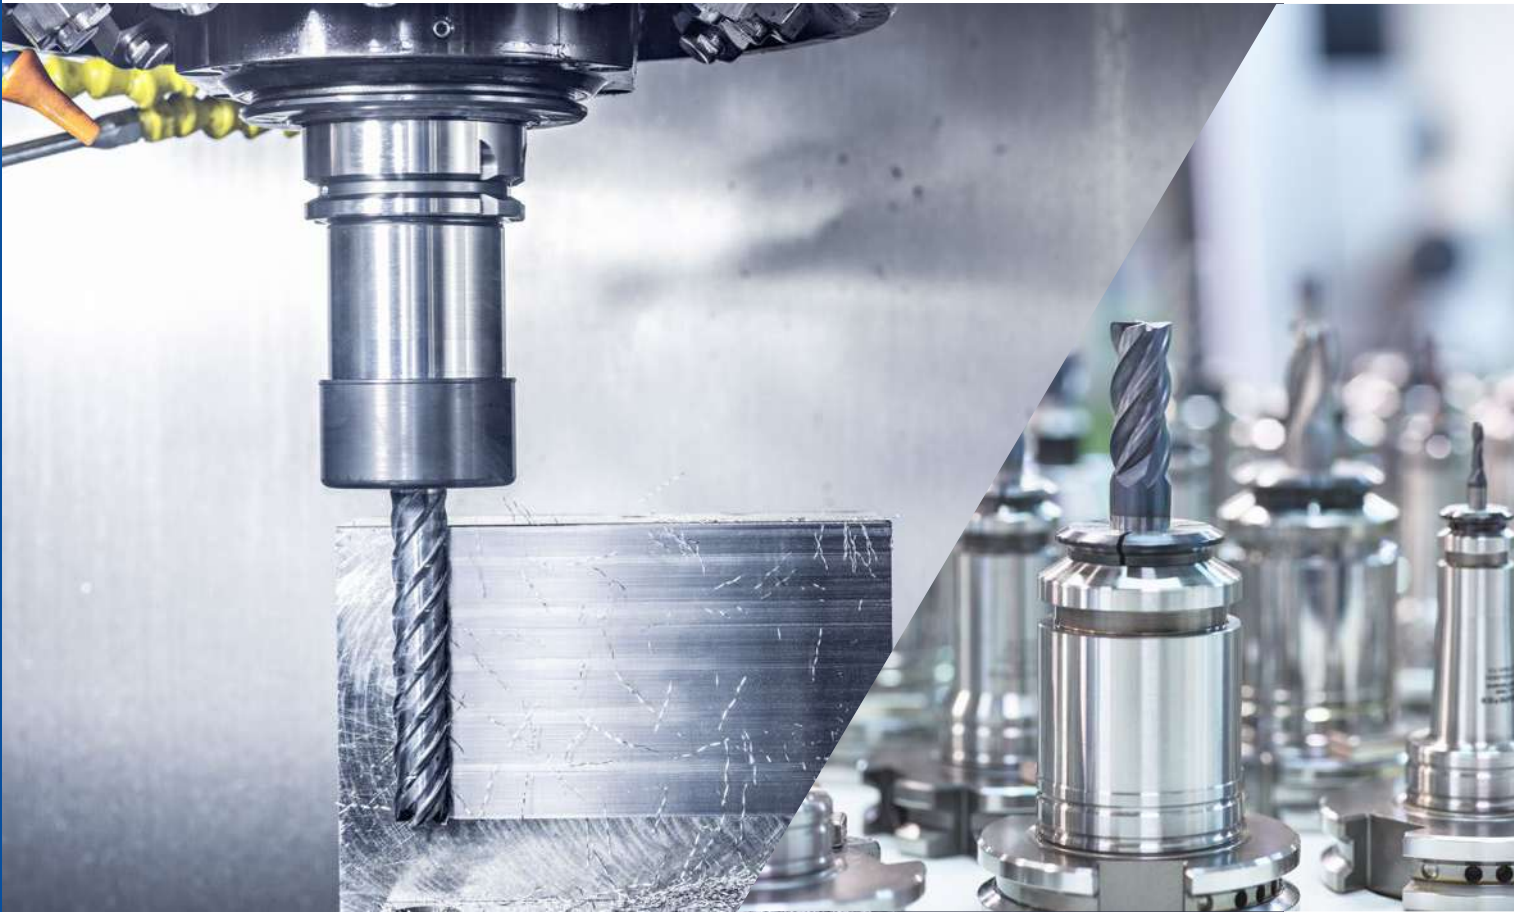

100% process safe standard solution against tool pull out

PROCESS SECURITY


No tool pull out and thus no costly rework or even damages to the workpieces.

STANDARD


Form-fitting clamping of standard tools with endmill flat for the advanced machining with complete security.

secuRgrip®


The threaded insert is designed to fit in every endmill flat – 100% security with a nut.



secuRgrip® is available for all standard tools with endmill flat, without additional modifications




Excellent vibration dampening




Increased productivity through security of process

Available for **powRgrip®** and **ER**

Avoid tool pull out

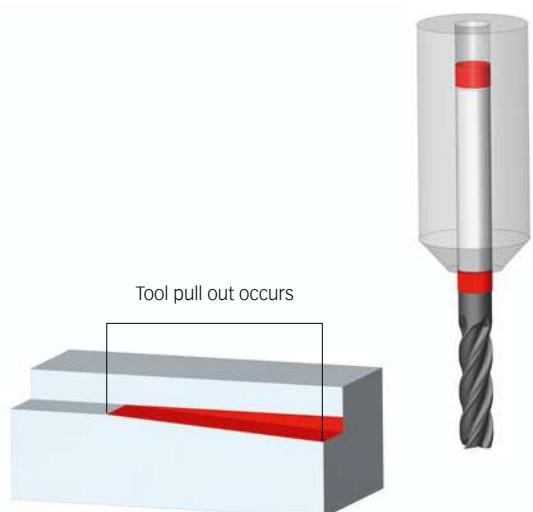

Changes in length can cause damages to the workpiece.

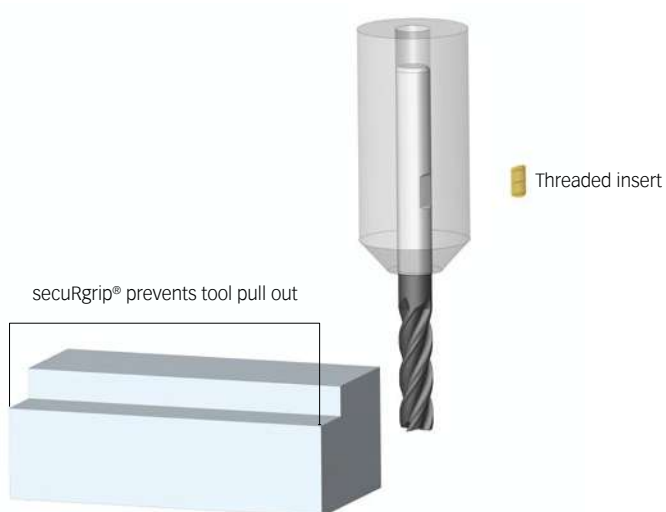

Workpiece damages are impossible thanks to REGO-FIX secuRgrip®.

Product overview



secuRgrip® for powRgrip®

Collets PG 15-SG, PG 25-SG and PG 32-SG
For shank diameter 10 – 25.4 mm (h6 tolerance)

Every standard PG toolholder for PG 15 to PG 32 can be produced/modified to PG-SG toolholder.

The PG toolholder head has a thread and the secuRgrip® safety nut secures the PG-SG collet in the toolholder.



secuRgrip® for ER Systems

Collets ER 32-SG and ER 40-SG
For shank diameter 10 – 25.4 mm (h6 tolerance)

The change from ER collet to an ER-SG collet makes every REGO-FIX ER toolholder to an ER-SG toolholder. No modifications on the tollholder are required.

